

Government of the People's Republic of Bangladesh

Ministry of Housing and Public Works **Urban Development Directorate (UDD)**

Preparation of Development Plan for Fourteen Upazilas

Package-04

(Saghata Upazila, District: Gaibandha; Sariakandi Upazila and Sonatala Upazila, District: Bogra)

FINAL SURVEY REPORT

PHYSICAL FEATURE, LAND USE, TOPOGRAPHIC SURVEY AND PHOTOGRAMMETRY WORKS Of Sonatala Upazila, Bogra

June, 2017





Government of the People's Republic of Bangladesh

Ministry of Housing and Public Works

Urban Development Directorate (UDD)

Preparation of Development Plan for Fourteen Upazilas

Package-04

(Saghata Upazila, District: Gaibandha; Sariakandi Upazila and Sonatala Upazila, District: Bogra)

FINAL SURVEY REPORT

LAND USE SURVEY
Of
Saghata Upazila, Gaibandha

June, 2017



TABLE OF CONTENT

-	ΓABLE OF CONTENT	1
I	LIST OF TABLES	2
I	LIST OF FIGURES	3
I	LIST OF MAPS	4
I	LIST OF PHOTOGRAPHS	5
CHAPT	TER ONE: INTRODUCTION	1
1. 0 B	ackground	1
CHAPT	TER TWO: METHODOLOGY	3
2.0 R	econnaissance Survey	3
2.1 C	ompilation and Preparation of Base Map	3
2.1.	1 Project Area Based on Mauza Maps	3
2.1.	2 Satellite Image Processing	3
2.1.	Physical Feature Extraction from Satellite Image	8
2.1.	4 Preparation of Land Use Survey Base Map	9
2.1.	5 Preparation of Log Book for Land Use Attribute Collection	9
CHAPT	TER THREE: FIELD LEVEL DATA ACQUISITION	11
3.0 M	obilization of Survey Team	11
3.1 La	and Use Survey	12
CHAPT	TER FOUR: SURVEY DATA PROCESSING & ANALYSIS	15
4.1	Processing of Land Use Data	15
4.2	Preparation of Land Use Map	17
CHAPT	TER FIVE: WAY FORWARD	20

LIST OF TABLES

Table 3. 1: Composition of Survey Team	11
Table 3. 2: Broad category of Landuse for Landuse survey	12
Table 4. 1: Land Use Categories	16

MEPC ii

LIST OF FIGURES

Figure 3. 1: Color used by Color Pencils for Land Use Demarcation	. 14
Figure 3. 2: Land-use Base Map used in Saghata Upazila	. 14
Figure 4. 1: Legend of Existing Generalized Landuse	.18

MEPC iii

LIST OF MAPS

Map 1. 1: Project Area Map of Saghata Upazila	2
Map 4. 1: Land Use in Saghata Upazila Area	.19

MEPC iv

LIST OF PHOTOGRAPHS

Plate 1: Satellite Image Digitization by Digital Photogrammetry	10
Plate 2: Updating works using Surveyed Map	10

MEPC V

CHAPTER ONE: INTRODUCTION

1. 0 Background

Planned development of Upazila is a coordinated way including rural and urban area as are very much important for sustainable development all over the area. Planned development is utmost important to accommodate all social, economic, administrative, infrastructure services and service facilities for the region. The government's intention is to reflect the national policy of bringing development administrative and service facilities to the door step of rural masses and to ensure better delivery of government services to the people. Realizing the fact and importance of formulating development plans for upazilas, Urban Development Directorate has come up with a good initiative to plan those areas. At the first phase of this initiative UDD has decided to prepare development plan for 14 Upazilas under five different packages. For each package separate consultancy team has been appointed to carry out the job more fruitfully. Modern Engineers Planners and Consultants Ltd. (MEPC) has been selected for package-4 (Saghata Upazila of Gaibandha District and Sariakandi Upazila & Sonatala Upazila of Bogra District) by project evaluation committee of UDD.

The proposed Development Plan also includes the suggestion for improvement of the management ability of the Upazilas/ Upazila authorities including revenue earning capability enhancing to building up the Upazilas/ authorities as a self-sustaining local government institutions. The Development Plan exercise will also suggest construction of roads and bridges/ culverts, drainage facilities, streetlights, markets, bus stands, solid waste management, sanitation, water supply and other such infrastructure facilities.

An understanding of the use of land of an area provides valuable information about the reasons of developing of a particular location; its demand, positive and negative side effects on surrounding etc. which are very crucial for suggesting development pattern and control on that land. This information will be incorporated into development plan preparation with aiming of optimizing landuse, assessing suitability, enhancing productivity and ultimately achieving sustainable practices. The assessment of existing landuse pattern of Saghata Upazila has been made through landuse survey to preparation of development plan to forecast the future demand for different landuses and to recommend actions for optimizing the landuse. This chapter includes the methodology followed to conduct survey for further process of preparation of development plan.

Project Area Map of Saghata Upazila Gaibandha Palasbari Padumsahar **Fulchhari** Bhartkhali Muktanagar Dewanganj Saghata Saghata Kachua Ghuridaha Gobindaganj Islampur Kamaler Haldia Jumarbari Sonatala Sariakandi Bangladesh Gaibandha District Legend (Upazila Map) Gaibandha District Union Boundary Upazila Boundary District Boundary Urban Development Directorate (UDD) ation of Development Plan for Fourteen Upazilas Package No: 04 Saghata

Map 1. 1: Project Area Map of Saghata Upazila

CHAPTER TWO: METHODOLOGY

2.0 Reconnaissance Survey

To complete the land use survey report a field visit was conducted in the Upazila areas by a team of Team Leader, Urban planner and urban economist to identify the urban growth factors and potentialities, orderly growth of urban areas, trends of urban growth and expansion of town through observation and consultation with the Upazila authorities and local people. During the visits maps and drawings were consulted in order to identify the national and regional setting, assess the topographical and physical features, acquaint with the changes of the areas, direction of present development and potentialities of future development etc. The purpose of the visit is to provide a context for the future potentialities of development of the upazila town.

2.1 Compilation and Preparation of Base Map

2.1.1 Project Area Based on Mauza Maps

The coverage of the Development Plan area includes existing urban areas and rural areas under the Upazila. The project area is found 227.94 square kilometer (2279390 acres) according to the mouza maps.

2.1.2 Satellite Image Processing

Photogrammetric method used satellite/aerial stereo images to create Digital Elevation Model (DEM) shown in Map 2.1 and make geospatial database more effectively.

Image was collected from Satellite image provider. The Satellite image in 0.5-meter panchromatic and 1.0-meter multi spectral four-band images in stereo pairs procured for town area. The 0.5-meter pan and 1.74-meter multi spectral imagery was also fused to yield 0.5-meter colour imagery (pan-sharpened) and 2.5-meter stereo image was also collected for country area.

Map 2. 1: Digital Elevation Model (DEM) of Saghata Upazila

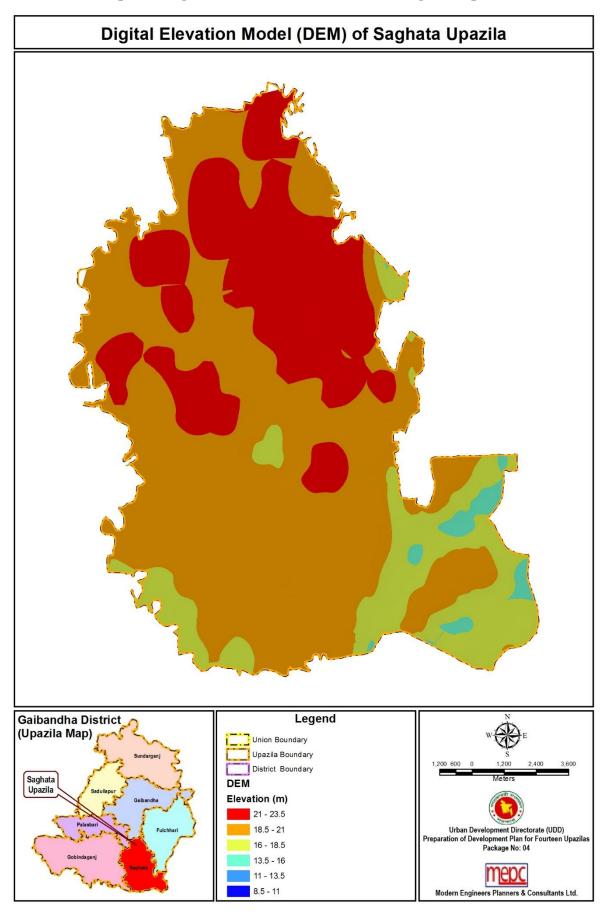


Image Processing

Image processing is done on collecting raw digital images. The tasks involved in image processing are:

- Epi-polar Correction
- Color Balance
- Contrast Adjustment
- Sharpening
- Pyramid
- Bit Rate Setting

GCP Collection

Ground control point has been selected by photo identification of existing ground features. Considerable number of GCP was collected as required for the whole study area. All GCPs has been collected by conducting field survey using RTK GPS method. After collecting GPS data of the GCP, post processing was done day to day in the sites. Accuracy level was maintained within 10 cm.

Aerial Triangulation

Aerial Triangulation is a mathematical process used to determine the real world position, height from mean sea level and orientation of each photograph. Aerial Triangulation was provided the accurate stereo (3D) model of image. One of the most advanced aerial triangulation is Inpho Match-AT.

Input for AT	Output of AT
- IMU, RPC data	Geo-referenced Stereo Model
- GPS (on board)	
- GCP (collected from field)	
- Image	

Digital Mapping from Stereo Model

On orientation of stereo models is used digital mapping was carried out. ArcGIS Geo-database/ shapefile model for storing geo-spatial data. The proposed Geo-database and its Feature classes have been designed based on the followings:

- Projection Parameters of the Coordinate System
- Name and type of layer (feature classes)
- Structure of Attribute Tables of the Feature classes

- Digital Photogrammetric Workstation e.g. Datem Summit Evolution (DPW) was used as the platform for acquiring features from digital stereo images (model).
- Feature registration was done considering and measuring the position of the object under its accuracy level. The Summit Evolution & Stereo Plotter of DAT/EM was used for identifying and registration of the objects and ArcGIS 9.2 or higher version of ESRI was used for vector data storing and editing.

Attribute Data Collection

- Attribute data of the features was collected from the field after producing base map. It was a step by step process.
- Attribute of different floors in each building would be collected by the consulting firm
- The attribute data shall be collected in HAZUZ compatible format.

Map Updating

Attribute data collected from the field, was incorporated into the features in this stage.

Field Check

Field checking was done check the following:

- Dimension and shape of the features
- Accuracy of feature's attributes
- Missing objects.
- Data was collected by total station where cloud was found in the image or some object which is not able to identify in image.

DTM/DEM/TIN/Contour Generation

- **DTM Point:** Digital photogrammetry is able to acquire 3D points for high spatial resolution DEM generation through semi-automatic procedures, overcoming the problems of process. In the approach, DTM Points was generated from Stereo Pair images by the software, and editing of the software generated DTM points was done by the Photogrammetrist comparing them with stereo model. Creating and editing of Breaklines was done after this stage.
- Contour: After creating DTM Points, Contour lines was produced 1. The contour lines was delivered in 1 km x 1 km or 5 km x 5 km blocks or one single file for the project area.
- **DEM:** Using DTM Points DEM was generated at a resolution of 10 meters in 1 km x 1 km or 5 km x 5 km blocks or one single file for the project area.
- **TIN:** Using DTM Points TIN was generated and delivered in 1 km x 1 km or 5 km x 5 km blocks for the project area.

• **OrthoPhoto:** An orthophoto or orthophotograph is a photograph which terrain corrected ("orthorectified") such that the scale is uniform: the photo has the same lack of distortion as a map. Orthophotographs are commonly used in the creation of a Geographic Information System (GIS).

a. Ortho-rectification of Images

Ortho-rectification of every image was carried out using digital photogrammetric system based on result of aerial triangulation and the generated DEM.




Figure 2. 1: Ortho-rectification of Images

Mosaicking of OrthoPhoto

Individual rectified photograph was assembled to form seamless mosaic.

Mosaicking of OrthoPhoto includes the following tasks

- i. Seam line Drawing: Drawing the boundary of the image delineating which part of the image was gone which image.
- ii. Balancing of Color and Contrast within different images Feathering

2.1.3 Physical Feature Extraction from Satellite Image

Spatial data are characterized by information about the position, connections with other features. These spatial data can be represented as either layers based or object oriented approach. In both approaches the data must be simplified with feature wise separate entities before incorporate in the GIS database. These entities are:

Point Features: Points were used to represent the locations of the features that are too small to be represented as areas. Different annotations as point features were used in Saghata Upazila Landuse map.

Line features: Line was used to represent geographical features with polyline category, such as road centerline, railway center line, etc.

Polygon features: Polygon or Area was used to represent geographical features with closed boundaries, such as building structures, water bodies, Landuse, topography etc. In Saghata Landuse map, Mouza boundary as polygon features was used.

All of these features contain a numeric user ID representing their feature type in GIS database structure. Every layer is thematic and that reflects either a particular use or a characteristic of the landscape. Spatial data structures are classified into raster or vector data.



Figure 2. 2: Physical Feature Extraction from Satellite Image

2.1.4 Preparation of Land Use Survey Base Map

Landuse Maps incorporated various shape files such as road, structures, water bodies, utilities facilities etc. Landuse Maps has been prepared and printed on 1:990 scale and grid cells contained a single cell size of about 106650 Sq.m. The Landuse Map has prepared by overlying the physical features survey on RS Mouza map. The landuse map has been prepared according to the detailed categories and presented indicating the broad categories of landuse by extracting from the Mouza map. Different types of landuse maps is illustrated in before prepared according to the Landuse category and presented in the different sub-sections.

2.1.5 Preparation of Log Book for Land Use Attribute Collection

Log book is prepared for land use attribute collection. Attribute is the non-spatial data associated with spatial data i.e. point, line and polygon/area entities. Attributes give additional information about the character of the entities. Each spatial entity may have more than one attribute. For example, a polygon feature presenting a building structure may have a number of other attributes like, building type, the number of floors and purpose of use. A point feature representing the hotel may have a number of other attributes: the number of rooms; the standard accommodation; name and address of the owner. Attributes give additional information about the character of the entities. The all attribute data are managed using GIS software.

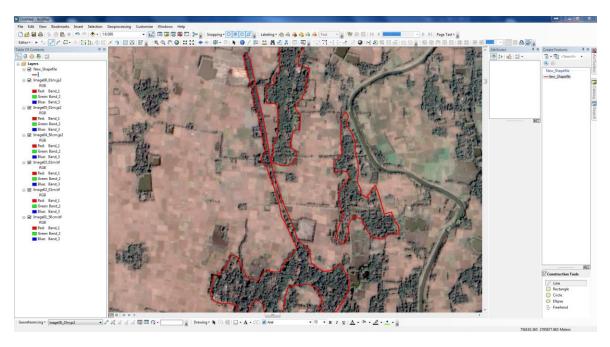


Plate 1: Satellite Image Digitization by Digital Photogrammetry

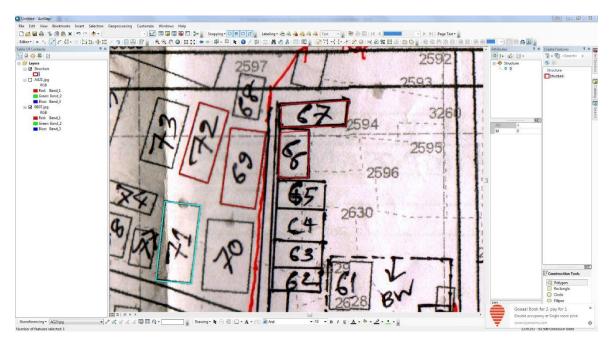


Plate 2: Updating works using Surveyed Map

CHAPTER THREE: FIELD LEVEL DATA ACQUISITION

3.0 Mobilization of Survey Team

A highly technical survey team comprising Urban Planner, GIS Expert, Survey Expert and Survey Assistants was mobilized to conduct the topographic and physical feature surveys. The Urban Planner led the survey team under the close supervision of the Team Leader of the project to ensure the quality of the survey. A list of Survey team is presented in Table 3.1.

Table 3. 1: Composition of Survey Team

Sl.	Designation	Nos.	Qualification	Year of Experience	Responsibilities
1.	Urban Planner and Survey coordinator	01	Masters of Urban and Regional Planning	10	Coordination of overall survey work
2.	Survey Expert	01	B.Sc Engineering in Civil	07	To conduct, coordinate and monitor physical feature, topographical and land use, survey
3.	Photogrammetric Expert	01	M.Sc in Geography	06	To prepare topographic, physical feature, land use and other related map of the area
4.	GIS Specialist	01	Bachelor in Geography	06	To prepare, supervise, manage and monitor digital database (Spatial and attribute) of the project
5.	RTK-GPS Surveyor	04	Diploma in Civil Engineering	05	Establishing primary and secondary BM/control points
6.	Total Station Surveyor	12	Diploma in Civil Engineering	05	Topographic and physical feature survey

3.1 Land Use Survey

The landuse map was prepared indicating the broad categories of land use indicated as shown in the Table 3.2:

Table 3. 2: Broad category of Landuse for Landuse survey

Sl.	Land uses	Illustrated			
1.	Residential	Planned Residential Area, Govt. Quarters, Private Housing, Rest/Guest/Circuit House, Banglow, Mess, Orphanage/Old Home, Rural Homestead, Slum, Squatters.			
2.	Commercial	Residential Hotel/ Hotel & Restaurant, Wholesale Rice Market, Wholesale Vegetables Market, Wholesale Fish Market, Wholesale Paper Market, Wholesale Grocery Goods Market, Wholesale Fruit Market, Book Stall, Cloths Shop, Paper & Magazine, Stationery Shop, Shoe Shop, Bag & Leather Goods, Cosmetics, Spectacles, Electronic Goods, Audio Video Cassette, Utensils/Crockery, Sports Goods, Computer Goods, Motor Car Parts, Jewelry shops, Show Room, Furniture Shop, Department Store, Mobile Sales Center, Hardware Goods, Sweet Shop, Bakery Shop, Gift Shop, Press & Printing, Grocery Shop, Gun Shop, Iron & Steel Shops, Shopping Center/Mall, Shopping Mall, Super Market, Rubber Stamps, Phone-Fax-Photocopy, Cycle Store, Studio/Colour Lab, Drug/Pharmacy, Pottery shop, Electronics, Sports and Athletics, Kitchen Market, Katcha Bazar, Beauty Parlor/Hair dresser, Govt. Food Godown, Cold Storage, Others Godown.			
3.	Mixed Use	Commercial – Residential, Office – Residential, Commercial – Industrial, Two or More categories.			
	Transport Facilities	RHD Road/LGED Road, Primary Road/ Major Through fare, Secondary Road (Pucca), Secondary Road (Katcha), Local Road (Pucca), Local Road (Katcha), Access Road (Pucca), Access Road (Katcha), Footpath (Paved), Footpath (Unpaved), Walkway, Embankment cum Road, Airport / Bus terminal / Truck terminal / BRTC bus Depot / Tempo stand / Rickshaw stand / Railway station / BIWTA Terminal/ Launch Terminal etc, Broad gauge, Meter gauge, River, Ferry Ghat, Filling Station, Garage, Passenger shed, telephone exchange, ticket counter, transport office etc.			
5.	Administrative	Deputy Commissioner's Office, Zila Parishad Office, SP Office/Police Headquarter, Civil Surgeon Office, LGED Office, Upazila Headquarter, Paurashava Office, Union Parishad Office, Settlement Office, Post office, Bank, Public Works Department Office, R&H Office, DPHE Office, Police Station, Ansar Camp, Jailkhana, Statistical Bureau Office, PDB Office, BWDB Office, DoE Office, All types of Government Office, Private Bank/ Insurance Company, Mercantile & Cooperatives, Money Exchange Center, Private company/Different types of NGO/CBO/Club, Construction Office, Commercial Group Office, Trading Corporation Office, Security Service Office, Law			

Sl.	Land uses	Illustrated
		Chamber, Doctor's Chamber, Political Party Office, Professional's Association, Labor Union.
6.	General Industry	Green and Orange A categories as per The Environment Conservation Rules, 1997.
	Heavy Industry	Other toxic and pollutions Industries (Orange B and Red categories as per The Environment Conservation Rules, 1997)
8.	Agricultural	Single crop land, Double crop land, Triple crop land, Barren land, Mango garden/Litchi/Jackfruit/Banana/Lemon/others, fruits garden etc., Different types of flower garden, Tree cultivation, Hatchery/Gher, Livestock / Poultry Farm / Diary Farm, Agricultural Research Area.
	Educational and Research	Kindergarten and Nursery, Primary School, High School, College, Public University, Private University, Public Medical College, Private Medical College, Homeopathic Medical College, Engineering College/University, Law College, Social Research, Health Research, Economic Research, Vocational Training Institute, Physical Training Institute, Nursing Training Institute, Teachers Training College, Computer Training Institute, Dakhil Madrasa, Alim Madrasa, Fazil Madrasa, Kamil Madrasa, Hafezia Madrasa, Tutorial/Coaching Center, Government Training Institute, Library, Museum, Social Welfare Institution
	Health Facilities	Govt. Hospital / Pvt Hospital / Mental Hospital/ Maternity/ Children Hospital / Clinic/ Diagnostic Center, Veterinary Hospital.
	Recreational Facilities	Cinema Hall, Theater Hall, Museum & Art gallery, Auditorium/Community Center/Town Hall, Park/Playground/Amusement Park/Theme Park, Stadium/ Gymnasium/Swimming Pool, Tennis Complex.
	Religious Area	Mosque, Eidgah / Mazar/ Dargha, Temple, Church, Pagoda, Graveyard, Cemetery, Cremation place.
	Utility Facilities	Utility services include Overhead Tank, Power Office/Control Room, Public Toilet, Sewerage Office, Waste Disposal, Fire Service, Water Pump House, Water Reservoir, Water Treatment Plant, etc.,
	Community Facilities	Community Center, Social Club, Slaughter House, Monument, Shahid Minar etc. which will provide service to the community.
	Restricted Facilities	Cantonment/BDR/Navy, TV Station, Radio Station, T&T Board, Power Supply Station.
16.	Open space	Historic Sites, National Park/Botanical Garden, Zoological Park, Forest. Land/Urban Green, Ecological park/sites, River Bank
17.	Water bodies	Pond, Beels, Lakes, River, Khals, Streams, Drain.

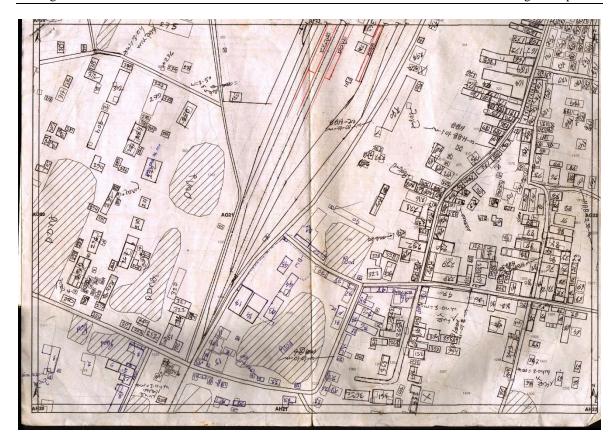


Figure 3. 1: Color used by Color Pencils for Land Use Demarcation



Figure 3. 2: Land-use Base Map used in Saghata Upazila

CHAPTER FOUR: SURVEY DATA PROCESSING & ANALYSIS

4.1 Processing of Land Use Data

Landuses were divided into different categories (with characteristics) at the beginning of the project, Although the Landuse classification was difficult to maintain in Saghata as not all uses are found in the classification scheme, however, it provided a structure for the project. The classification as per ToR has given in the next section.

Spatial information or data of all existing land uses from land use survey was processed and stored under a comprehensive GIS database component. GIS software such as PC ArcGIS has used for processing of physical survey data. Data was stored in WGS-1984 format (latitude, longitude, ellipsoidal height in meter) and later it was projected and stored in BUTM projection system.

The Maps was projected in BUTM coordinates or with the consultation with experts. Projection parameters was as follows

Name of Coordinate System : BUTM 2010

Projection : Transverse Mercator

Reference Ellipsoid : WGS 1984

Datum : WGS 1984

Latitude of Origin : 0^o N

Central Meridian : 90° East

False Easting : 5, 00,000m

False Northing : 0m

Scale Factor at Central Meridian : 0.9996

Table 4. 1: Land Use Categories of Urban Area of Saghata

Sl. No.	Land use Type	Land use Type Total Area (Sq.KM)	
1	Agriculture	3.204	70.88
2	Commercial	0.038	0.83
3	Education and Research	0.019	0.42
4	Government Services	0.015	0.33
5	Group of Trees / Forest	0.252	5.57
6	Health Services	0.023	0.52
7	Manufacturing and Processing Activities	0.003	0.06
8	Residential	0.938	20.74
9	Vacant Land	0.029	0.64
	Grand Total	4.521	100.00

Residential

Residential land use covers about 20.74% of total land in this area. From the table it is seen that in this Upazila there is not considerable amount of land devoted to this category and which is about 0.938 sq. km.

Agriculture

From the field survey it is evident/ reflect that about 3.204 acres (70.88%) of the total area is under the use of agriculture.

Commercial

This type of land use covers about 0.83% of total land in urban area of Saghata. From the table it is seen that in this Upazila there is considerable amount of land devoted to this category and which is about 0.038 sq. km.

Government Services

This type of land use covers about 0.33% of total land in urban area of Saghata. From the table it is seen that in this Upazila there is not considerable amount of land devoted to this category and which is about 0.015 sq. km.

Education and Research

This type of land use covers about 0.42% of total land in urban area of Saghata. From the table it is seen that in this Upazila there is not considerable amount of land devoted to this category and which is about 0.019 sq. km.

Health Services

Health Services related land covers about 0.52% of total land in this area. From the table it is seen that in this Upazila there is not considerable amount of land devoted to this category and which is about 0.023 sq. km.

Manufacturing and Processing Activities

Manufacturing and Processing Activities land covers about 0.06% of total land in this area. From the table it is seen that in this Upazila there is not considerable amount of land devoted to this category and which is about 0.003 sq. km.

Group of Trees / Forest

Group of Trees / Forest land covers about 5.57% of total land in this area. From the table it is seen that in this Upazila there is not considerable amount of land devoted to Group of Trees / Forest and which is about 0.252 sq. km.

4.2 Preparation of Land Use Map

To prepare Landuse Maps we incorporated various shape files such as road, structures, water bodies, utilities facilities etc. Landuse Maps have been prepared and printed on 1: 3960 scale. The Landuse Map is prepared by overlying the physical features survey on RS Mouza map. The landuse map is prepared according to the detailed categories and presented indicating the broad categories of landuse by extracting from the Mouza map. Different types of landuse maps were prepared according to the Landuse category.

Land use survey basically records the use of land by its functional activity such as residential, industrial or commercial etc. during the TS and RTK GPS based physical feature survey each survey feature was recorded with individual ID or code representing their use. At the same time, uses of lands without structures were coded on mouza plots. Later on land use features was identified and classified using the recorded code and separated in different layers during data processing stage, from where the category wise land use map has drawn using the identification layers of each land use features. The land use map has prepared indicating the board categories of land use described in ToR. The characteristics of each land use area has described in the survey report.

Map Printing at proper scale

After completing the survey and all the GIS processing, the Maps was printed by the consultant. Maps were printed at given direction with proper annotations, titles and legend. The color grading and symbols for the map layout would be in accordance with the standards of the Client.

Attribute Data Base of the Digitized Mouza Map


The consultant was submitted all attribute data of all the features in the mouza map including individual plot number, Sheet No, Mouza Name etc. that was generated from the spatial database.

Satellite Image Processing By Using Photogrammetric Method


Photogrammetric method uses satellite/aerial stereo images to create Digital Elevation Model and make geospatial database more effectively. With the advent of latest trends in the technologies and unique customer requirements, photogrammetry is now the leading

technology for mapping. The field of photogrammetry is a rapid science with new technologies being developed constantly. Within a short period of time, the practice of photogrammetry has changed from analog to digital. The development of digital aerial cameras has advanced significantly over the past 4-5 years. The use of digital aerial images would be more advantageous for all map and image production especially for Digital vector data and Orthophoto generation.

Figure 4. 1: Legend of Existing Generalized Landuse

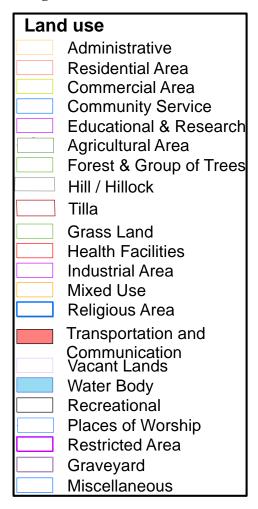

Map 4. 1: Land Use in Saghata Upazila Area

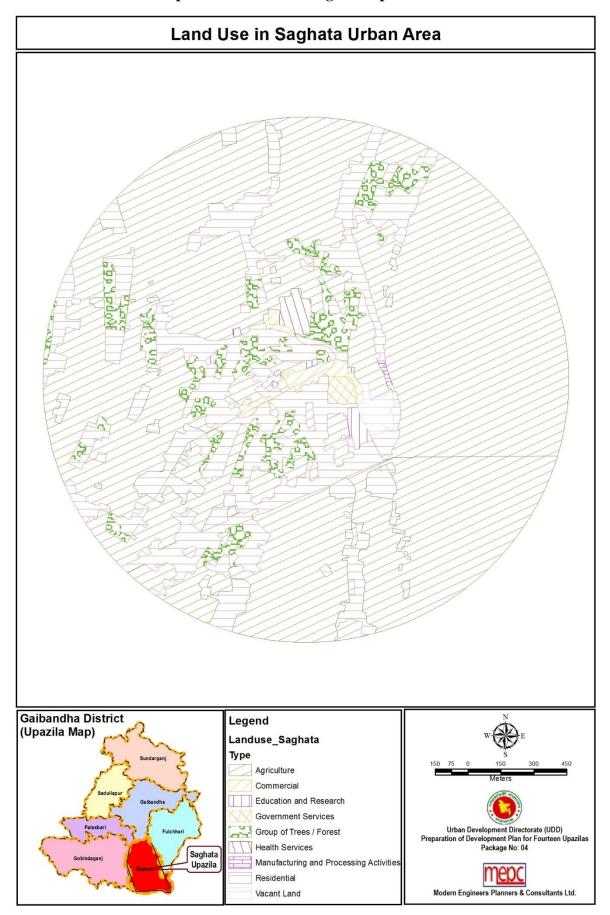

CHAPTER FIVE: WAY FORWARD

The preparation of any plan for the development of an urban area, city or town requires reliable factual data regarding existing lanuse conditions such as agriculture, circulation network, commercial, education and research, government services, group of trees / forest, health services, manufacturing and processing activities, religious, residential, transport and communication, vacant land, water body and recreational facilities. The process of collecting such data is called landuse survey.

From the land use survey it has found that Saghata has a domination of agricultural land use. Besides, this town has grown up beside the river. There are a lot of waterbody spread inside the town. This type of land use pattern gives a direction of future planning for this upazila. As this upazila is agriculture dominated and its major land use includes the water body so the future development plan will be agro based and fisheries industry development. Moreover, this land use survey gives a direction of water based transportation development.

The land use of the project area has divided into two categories. They are urban and rural. In urban areas, it is necessary to develop sustainable residential communities both on land zoned for residential development and in mixed use areas. Objectives will promote the use of appropriate residential densities dependent on location, the use of an appropriate variety and mix of good quality, well designed dwelling types and sizes, and the encouragement of infill and brownfield development to consolidate existing towns in preference to urban development. On the other hand the rural areas have a distinctive and valuable asset within the rural area with opportunities for the establishment of sustainable rural communities. Development Plan objectives enhance this particular community aspect and spirit by building upon unique and key strengths. It will ensure development of rural area in such a way as to provide a sustainable mix of commercial and community activity within an identified village core which includes provision for enterprise, residential, retail, commercial, industrial, production and community facilities.

Letter of Transmittal

Ref No.: MEPC/UDD/2017/41	Date: 04.06.2017
То	
The Project Director	
"Preparation of Development Plan for Fourtee	en Upazilas" Project
Urban Development Directorate (UDD)	
82 Segun Bagicha, Dhaka-1000.	
Subject: Submission of the Final Physical and Photogrammetry Works Rep	, , , , ,
Dear Sir,	
I have the pleasure to submit herewith the Fin Survey and Photogrammetry Works Report "Preparation of Development Plan for Fo (Saghata Upazila, District- Gaibandha; Sonat Bogra) for your kind information and further a	of Sonatala Upazila, Bogra District under burteen Upazilas Project" Package No: 04 ala Upazila and Sariakandi Upazila, District-
Thanking you and assuring you of our best se	rvices.
Best Regards	
(Engr. A. Sobahan)	(Shamim Mahabubul Haque)
Managing Director of MEPC	Team Leader, Package-4

MEPC i

Executive Summary

Sonatala is a traditional Upazila of Bogra district. It was established as Thana in 1981 and converted as Upazila in 1983. It lies between 24°55' and 25°04' north latitudes and in between 89°26' and 89°41' east longitudes (Source: Physical Feature Survey, 2016). Sonatala Upazila is a flood prone area located at Bogra district under Rajshahi Division. The Upazila is adjacent to four others Upazila namely Sonatala Upazila (Bogra district) at east, Shibganj Upazila (Bogra district) at west, Gobindaganj Upazila (Bogra district) at north and Gabtali Upazila (Bogra District) at south. Most of the business, economic and administrative activities are based on the Sonatala Upazila area.

Jamuna river passes beside the Sonatala Upazila and good communication facilities of the Upazila is being developed as an important center for agriculture, horticulture, trade and commerce. Sonatala Upazila has good prospects of varies industrial growth such as agriculture based industries and saw mills. The major problems of the Upazila are lack of community and utility facilities, lack of infrastructure facilities, unplanned drainage system, unplanned residential development etc. General expectation of the inhabitants is a better planned Area Plan for Upazila as well as an effective Land use Plan and Action Area Plan including indication of development control measures.

This report contains four individual reports as following

- 1. Physical Feature Survey
- 2. Land Use Survey
- 3. Topographic Survey and
- 4. Photogrammetric Works

This report contains introduction of this report and location of the Sonatala Upazila and the background of the Upazila.

The report also provides regarding the Methodology, construction and installation of BM pillar, collection, scanning, Geo-referencing and digitization of Mouza Maps, Edit plot checking of digitized Mouza maps, Joining of Mouza maps, preparation of GIS layout map etc. It also deals with detailed activities of Topographic and Physical Feature survey. All physical feature and topographic survey techniques using sophisticated equipment like RTK-GPS has been described.

Individual chapters and report describes the activities of field level data acquisition of Physical Feature survey in Sonatala Upazila has been done using the survey base maps from High resolution Ortho-rectified satellite image along with photogrammetric data has been used in preparing base map for conducting the surveys. Survey team was equipped with hand GPS/ GPS enabled Smart Phone, measurement tape, color pens, maker pens,

MEPC ii

survey map sheet, log book, etc. They were trained properly before going to field and collect required information.

Topographic survey is a survey that measure the surface of the earth of any area with standard known coordinates of X, Y, Z value. This report contains the survey procedures along with findings and analysis of the topography of the project area. The survey was conducted according to the ToR of the project. Topographic features have been extracted by DTM point extraction and Generation of DEM/TIN.

List of Abbreviation/ Acronyms

BM Bench Mark

BUTM Bangladesh Universal Transverse Mercator

CS Cadastral Survey

DLRS Department of Land Record and Survey

dpi Dot per inch

GCP Ground Control Point

GIS Geographic Information System

GPS Global Positioning System

JPEG Joint Photographic Experts Group

MSL Mean Sea Level

RS Revenue Survey

RTK Real Time Kinematic

SoB Survey of Bangladesh

UDD Urban Development Directorate

PD Project Director

PM Project Manager

ToR Terms of Reference

DEM Digital Elevation Model

DTM Digital Terrain Model

RL Reduced Level

TIN Triangulated Irregular Network

KM Kilometer

MEPC iv

Table of Content

	Letter	r of Transmittal	i
		ıtive Summary	
	List o	f Abbreviation/ Acronyms	iv
	Table	of Content	v
	List o	f Tables	vii
		f Figures	
		f Maps	
		f Photographs	
C	CHAPTE	R ONE: INTRODUCTION	1
	1. 0 Back	groundground	1
C	CHAPTE	R TWO: METHODOLOGY	3
	2.0 Rec	connaissance Survey	3
	2.1 Co	mpilation and Preparation of Base Map	3
	2.1.1	Collection of Mauza Maps	3
	2.1.2	Approval of Collected Mauza Maps for Scanning and Digitization	6
	2.1.3	Scanning of Mauza Maps	6
	2.1.4	Preparation of Technical Specifications for GIS Database	7
	2.1.5	Digitization of Mauza Maps	7
	2.1.6	Edit Plot checking of the Digitized Mauza Maps	10
	2.1.7	Geo-referencing of Raster Mouza Map	10
	2.1.8	Geo-referencing of Vector Mouza Map	11
	2.1.9	Edge Matching of Mouza Maps	12
	2.1.10	Demarcation of the Project Area based on Mouza Maps	12
	2.2 Est	tablishment of Ground Control Point (GCP) / BM Pillars	12
	2.2.1	Selection of Sites for BM Pillars with justification	12
	2.2.2	Design and Construction of Pillars	12
	2.2.3	Construction of BM Pillars	
	2.2.4	Description of Reference BM Pillars	14
	2.2.5	Baseline Survey by RTK-DGPS Method	

	2.2	.6	Establishment of Coordinates (X,Y,Z) for BM Pillars	15
	2.2	.7	Marking of BM Pillars	15
2.	.3	Sat	tellite Image Processing for Data Acquisition	21
	2.3	.1	Physical Feature Extraction from Satellite Image	21
	2.3	.2	Preparation of Survey Base Map	23
	2.3	.3	Preparation of Log Book for Attribute Collection	24
СН	AP	TE	R THREE: FIELD LEVEL DATA ACQUISITION	25
3.	.0	Mo	bilization of Survey Team	25
3.	.1	Phy	ysical Feature Survey	26
СН	ΙΑΡ	TE	R FOUR: SURVEY DATA PROCESSING & ANALYSIS	28
4.	.1	Pro	ocessing of Spatial and Attribute Data	28
4.	.2	Dev	velopment of GIS Database	29
СН	AP	TE	R-05: WAY FORWARD	36
	1	Refer	ences/ Bibliography	37
	A	Annex	xure-I: RS Mouza List of Sonatala Upazila	38
	A	Annex	xure-II: Technical Specifications of GIS Data	41
	A	Annex	xure-III: Structure Attribute Collection Form	77

List of Tables

Table 2. 1: Mauza Maps Collection from DLRS	3
Table 2. 2: Specifications for Scanned Mauza Maps	7
Table 2. 3: Specifications of the Scanner used for Scanning of Mauza Maps	7
Table 2. 4: Status of Scanning of Mauza Map	8
Table 2. 5: Status of Digitizing of Mauza Map	8
Table 2. 6: Location of Reference BM	14
Table 2. 7: Coordinates and Descriptions of the BM Pillars	15
Table 2. 8: Coordinates and Photographs of the BM Pillars	16
Table 3. 1: Composition of Survey Team	25

MEPC vii

List of Figures

Figure 2. 1: Flow Diagram for Preparation of GIS Database using RS Mauza Map	5
Figure 2. 2: Sample of Scanned Mouza Map.	6
Figure 2. 3: On Screen Digitization and Sample Digitized Mauza Map	9
Figure 2. 4: Sample Geo-referenced Raster Mauza Map Overlaid on Satellite Image	11
Figure 2. 5: Design of BM Pillars	13
Figure 2. 6: Workflow for Stereo Satellite Image Processing and Data Extraction	22
Figure 2. 7: Grids for Survey Base Maps of Sonatala Upazila	23
Figure 2. 8: Survey Base Map of Sonatala Upazila in Grids	24

MEPC viii

List of Maps

Map 1. 1: Project Area Map of Sonatala Upazila	2
Map 2. 2: Location of BM Pillars in Sonatala Upazila	18
Map 2. 3: Sample Base Map comprising Satellite Image and Photogrammetric Data	19
Map 2. 4: Sample Base Map comprising Mauza Map and Photogrammetric Data	20
Map 4. 1: Structure Use in Sonatala Town Area	34
Map 4. 2: Structure Type and Use in Sonatala Town Area	35

MEPC ix

List of Photographs

Plate	1: Sample of Constructed BM and Installed BM	14
Plate	2: Reference BM Pillar in Sonatala Upazila	17
Plate	3: RTK-GPS Observation	17
Plate	4: Digitization by Digital Photogrammetry	21
Plate	5: Surveyors Working on the Field in Sonatala	27
Plate	6. Undating Works through GIS	28

MEPC x

CHAPTER ONE: INTRODUCTION

1. 0 Background

Sonatala is a traditional Upazila of Bogra district. It was established as Thana in 1981 and converted as Upazila in 1983. The present Sonatala was a renowned business center from its ancient period. The settlement of this area was started centering the river 'Bangali'. The fertile land, communication facility over river way and excellent geography exerted a pull on people to live and conduct business here. Thus, settlement developed by the surrounding inhabitants and with the people of remote area as well. It is proverbial that the name 'Sonatala' was originated from the name 'Sona Bibi' who was the wife of Baro Vuiya chief Isha Khan. Isha Khan often visited this area along with his wife in sixteen century. The area has a lot of similarities with the historical 'Mahasthangar'.

Sonatala Upazila is a flood prone area located at Bogra district under Rajshahi Division. The Upazila is adjacent to four others Upazila namely Sonatala Upazila (Bogra district) at east, Shibganj Upazila (Bogra district) at west, Gobindaganj Upazila (Bogra district) at north and Gabtali Upazila (Bogra District) at south. Most of the business, economic and administrative activities are based on the Sonatala municipal area.

The total area of Sonatala Upazila is 156.76 square kilometer with a total population covering 1,67,547. The whole Upazila is covered by 101 Mouzas and the number of village is 131. The major rivers of the area are Jamuna and Bangali. Jamuna River runs along the eastern part of the Upazila adjoining to Tekani Chukainagar, Pakulla and Jorgacha Union from north to south (See Map 1.1). The Upazila has 331.61 acre khas land. The sandy land area, homogeneous topography, Char area, moderate moisture etc. are the common geographical characteristics of the study area. (Source: Bangladesh Population Census 2011, Bangladesh Bureau of Statistics).

Map 1. 1: Project Area Map of Sonatala Upazila Project Area Map of Sonatala Upazila Gobindaganj Saghata Shibganj (Bogra) Sonatala Madhupur Balua Tekani Chukainagar Digdair Jorgachha Sariakandi Gabtali Bangladesh Bogra District (Upazila Map) Legend Sonatala Upazila Union Boundary Upazila Boundary Urban Development Directorate (UDD)
Preparation of Development Plan for Fourteen Upazilas
Package No: 04

CHAPTER TWO: METHODOLOGY

2.0 Reconnaissance Survey

A field visit was conducted in the Upazila areas by a team of Team Leader, Urban Planner and urban economist to identify the urban growth factors and potentialities, orderly growth of urban areas, trends of urban growth and expansion of town through observation and consultation with the Upazila authorities and local people. During the visits maps and drawings were consulted in order to identify the national and regional setting, assess the topographical and physical features, acquaint with the changes of the areas, direction of present development and potentialities of future development etc. The purpose of the visits is to provide a context for the future potentialities of development of the town. During visits following points are considered to develop a profile of the Upazila.

- Identify the urban growth factors and potentialities
- Identify the orderly growth of urban areas
- Assess the trends of urban growth and expansion of town

2.1 Compilation and Preparation of Base Map

2.1.1 Collection of Mauza Maps

Mouza sheets were collected from Department of Land Record and Survey (DLRS) of Bangladesh as per the gazette notification of the Upazila Land Office. These maps are currently used in Union Parishad and Upazila for different purpose. The following Table 2.1 shows the list of Mouza Maps in Sonatala Upazila. The list of mouza maps is attached in Annexure-I.

Table 2. 1: Mauza Maps Collection from DLRS

Upazilla	Number of Mouza	Total Sheet collected	Mouza Type	Total Collected Mouza Maps (%)
Sonatala	95	95	RS	100%
Total	95	95		100%

Activities involved in the process of establishment of Bench Marks (BM) and demarcation of existing Upazila boundary for Sonatala Upazila are as follows:

- A. Collection of Mouza Maps
- B. Establishment of Bench Marks (BM)
 - Site selection
 - Construction of BM pillars
 - Installation
 - Establishment of Coordinate of BM Pillars (x, y, z i.e Northing, Easting and RL in meter)
- C. Establishment of Ground Control Points (GCPs)
- D. Base Map Preparation
 - Scanning of Mouza Maps
 - Digitizing of Mouza Maps
 - Edit Plot Checking of Digitized Mouza Maps
 - Georeferencing of Mouza Maps
 - Joining of Mouza Maps
 - Edge-matching of Mouza Maps
 - Participation of Upazila in the Demarcation of Upazila Area.
 - Preparation of GIS Map Layout
- E. Demarcation of Upazila Area

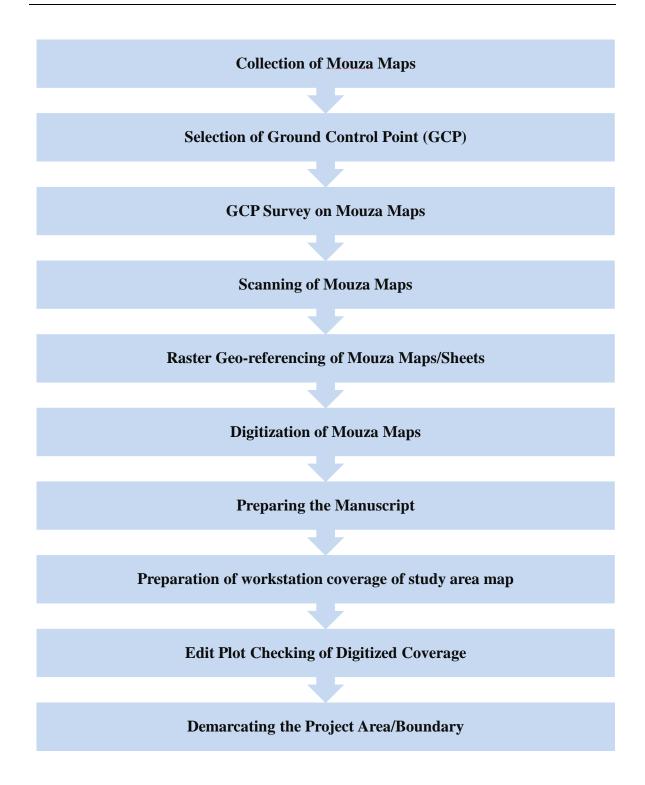


Figure 2. 1: Flow Diagram for Preparation of GIS Database using RS Mauza Map

2.1.2 Approval of Collected Mauza Maps for Scanning and Digitization

Mauza sheets/maps of RS version were collected from DLRS covering the entire project area. Figure 2.1 shows a sample scanned mouza map. To avoid distortion due to rapping or pasting cloths/tape in the mauza maps been avoided during collection of mauza maps. Before scanning of mauza maps all collected maps were submitted to UDD for review and quality check/authentication.

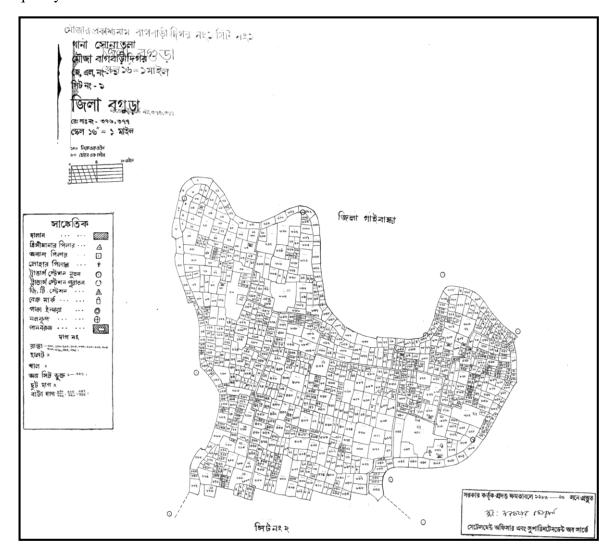


Figure 2. 2: Sample of Scanned Mouza Map. (Source: DLRS, 2015)

2.1.3 Scanning of Mauza Maps

The scanning process followed depending on the type of scanner used. In this work drum type roller scanner was used. Before the actual scanning, each sheet was unfold and straighten, and cleaned. The sheet was then set in the roller of the drum scanner and moved forward and backward several times. When it was ensured that the sheet can move forward and backward through the scanner without any difficulty and smoothly the sheet was brought to starting point of scanning and the scanning switch was made on. As one

sheet was completed the machine was stopped, and the same process was followed for the next sheet. This way of scanning was followed all the sheets of the project area. Each of the sheets was scanned in drum scanner in 300 dpi. The technical specifications of the scanner used for the purpose are shown in Table 2.2 and Table 2.3

Table 2. 2: Specifications for Scanned Mauza Maps

Image Type	Color or Gray scale
Image Format	JPEG
Image Resolution	300 dpi
Image Scale for Digitization period was required Map unit & Display unit select inches from drop down Icon. Otherwise, when you gave the Mouza map sheet prints as per same scale that time was not get the print copy of your mouza map scale.	(1:10-15)

Table 2. 3: Specifications of the Scanner used for Scanning of Mauza Maps

Brand & Model	HP Designjet 4200			
Scan Resolution,	• Print speeds ranging from 22.94 sq m/hr (247 sq feet/hr) for a			
enhanced	black line drawing to 2 sq m/hr (21 sq feet/hr) for a Best quality			
	image			
	2400 x 1200 dpi capability			
	 136 PostScript built-in Roman fonts 			
Scan Resolution,	Fast hardware digital imaging processing			
hardware	2400 x 2400 dpi (scaled) and 400 x 400 dpi (optical)			
Maximum scan Copy or scan documents up to 42 inches wide with 42 inches				
size	scan width			

2.1.4 Preparation of Technical Specifications for GIS Database

Feature wise manuscripts were developed for storing all map features with a separate ID in GIS database to keep the uniqueness of all Mouza features. A common feature wise manuscript is prepared as per suggestion and guidelines of PMO before starting the map digitization. The feature wise manuscripts followed in map digitization process are presented in Annexure-II.

2.1.5 Digitization of Mauza Maps

On screen digitization method was used for digitization of Mouza maps. Esri ArcGIS Desktop v10.2 software was used for digitization and database built. All features were stored in three different feature type (Line, Point and polygon) in ArcGIS Shape file with separate ID or code number. Polygons were built with necessary attribute database of each Mouza maps. Manuscripts given by the client was used for digitization of Mouza maps to keep uniqueness of all features, the ID or code numbers of respective features was


finalized as per suggestion and discussion with client. In This process includes adding a scanned mauza map in ArcMap, creating four empty shape files (2 point, 1 line and 1 polygon) of three basic shape file feature types in ArcCatalog. Then in ArcMap Editor tool was used to draw the mouza lines using drawing tools including advance editing tool bar. All the features of a mauza map such as Plot boundary, North line, Match line, Traverse Station, Plot number, Road, River, Pond, Halot, Canal, Building, Mosque, Temple, etc., are created and stored with attributes in four different vector layers as per the Technical Specification of GIS Database. On-screen digitization process and a sample digitized mauza map are shown in figure 2.3. Map Unit = Inch and Distance Unit = Inch was determined in Data Frame properties to get 1:1 map scale and later zoom in to 1:30 scale during the digitization process to gain maximum level of accuracy. Table 2.4 and 2.5 show the status of scanned and digitization.

Table 2. 4: Status of Scanning of Mauza Map

Upazila	Number of Mouza	Total Sheet collected	Total Number of Scan Completed Mouza	Total Scan Completed Mouza (%)	
Sonatala	95	95	RS	100%	
Total	95	95		100%	

Table 2. 5: Status of Digitizing of Mauza Map

	Number	Total	Total Number of	Total Digitizing
Upazila	of	Sheet	Digitizing	Completed Mouza
	Mouza	collected	Completed Mouza	(%)
Sonatala	95	95	RS	100%
Total	95	95		100%

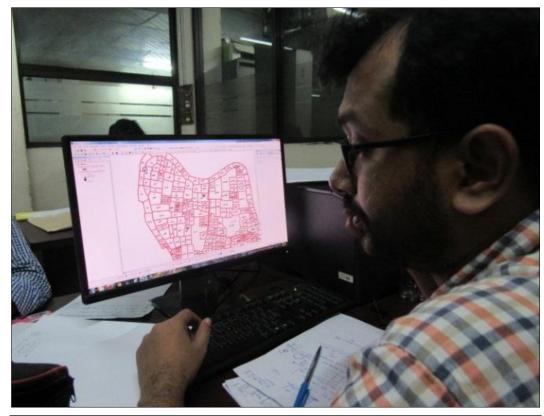

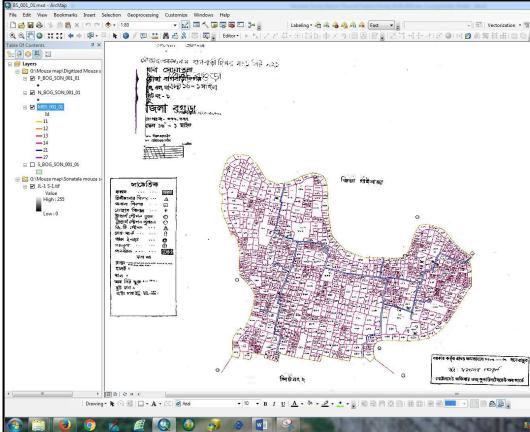


Figure 2. 3: On Screen Digitization and Sample Digitized Mauza Map

2.1.6 Edit Plot checking of the Digitized Mauza Maps

On completion of the digitization of sheet, edit plot checking of digitized coverage of the sheet was initiated. Edit plots was produced containing all features in different colors. Then the digitized sheets/Mouza maps was individually checked and verified by superimposing on the original Mouza sheets using light table. By the edit plot check all possible errors (missing arcs, dislocated arcs, wrong or missing polygon labels, Tic location and ID etc.) was eliminated and corrected and final Mouza maps was prepared. After completion of edit plot checking, the Mouza maps were stored in computer file and in CD's and also in hard copies. Sample geo-referenced raster mauza map overlaid on satellite image

2.1.7 Geo-referencing of Raster Mouza Map

Geo-referencing of digitized Mouza sheets/maps is the projection of the Mouza maps from digitized unit to real world coordinate units or transformation of coverage from digitized units to projected units. This projection process involves some distortion of certain map parameters such as shape, area, distance, or direction. Different projection systems produce different distortions. The characteristics of each projection made them useful for some applications. Digitized Mouza maps/sheets were geo-referenced with reference to the collected/ surveyed GCP values (Latitude and Longitude value) and were projected to BUTM projection system.

The Coordinate System used for both GCP and otho-rectified satellite image is the Bangladesh Universal Transverse Mercator (BUTM2010) which is established by the national mapping agency Survey of Bangladesh (SOB). The parameters of BUTM 2010 are as below:

Spheroid: WGS 1984

Datum : WGS 1984

Unit : Meters

False Easting : 500000

False Northing : 0.0

Central Meridian : 90.0

Scale Factor : 0.9996

Latitude of Origin : 0.0

In real world coordinates (Easting, Northing) of any point on the ortho-rectified satellite image, geo-referencing of mauza map was done by using this geometrically corrected satellite image as reference. The process of geo-referencing of mauza map using satellite

image is actually parcel (plot) of mauza map matching with respect to the ortho-rectified satellite image. The Figure 2.4 shows a sample geo-referenced raster mauza map which is overlaid on ortho-rectified satellite image. A suitable number of GCP (minimum 4), preferably plot corners and building corners, has been taken for proper geo-referencing of mauza map depending on its size and 2nd Order Polynomial Transformation was applied. Total RMS error was kept within 0.5/1.5 meter i.e. within 1 to 3 pixels of the satellite image. Thus individual sheet of the mauza maps get properly geo-referenced. Finally, permanently geo-referenced images of mauza maps have been created by using 'Rectify' tool of ArcMap.



Figure 2. 4: Sample Geo-referenced Raster Mauza Map Overlaid on Satellite Image

2.1.8 Geo-referencing of Vector Mouza Map

To prepare an efficient plan for a Mission Planning was done regarding RTK-GPS Survey. Mission Planning allows to know which GPS satellites should be visible from a given observation point on the surface of the Earth, and for a given period of time (max. 24 hours). Among GPS, GLONASS and SBAS satellites the following satellites were found available during the survey period of June-July 2016 in Sonatala.

RTK GCP survey was conducted simultaneously with the scanning and digitizing of Mouza Map. At least 3-5 Ground Control Points (GCP's) were selected and identified on Mouza Sheets on the basis of permanent, well-established and suitably located features. Temporary Control Point (TCP) was also selected on the Mouza Sheets for proper positioning of Map. At least 4 nos. of tentative Ground Control Points (GCP) are selected

on each mouza map/sheet identical with the real field condition such as corners of permanent buildings, traverse points, sharp corner of the mouza plots, road intersection, etc.

2.1.9 Edge Matching of Mouza Maps

The mouza maps/sheets, which are already geo-referenced individually, are joined using GIS based Arc GIS/ Arc Info software to get a composite map of the Upazila. The boundary of surrounding mouza maps/sheets are found hardly matched due to some unavoidable technical errors. Therefore, edge-matching of surrounding mouza maps/sheets are done through rubber sheeting and drawing a common line in between the boundary of adjacent maps/sheets.

2.1.10 Demarcation of the Project Area based on Mouza Maps

The latest Gazette of the Upazila was taken for demarcation of present and extended Upazila boundary for the future growth and expansion considering 20 years growth planning. A consultation meeting was conducted with participation of Upazila Nirbahi officer, Upazila Chairman, Councilors, Engineer, other staff and local elites to demarcate the existing Upazila Boundary and Pourashava Ward Boundary.

2.2 Establishment of Ground Control Point (GCP) / BM Pillars

2.2.1 Selection of Sites for BM Pillars with justification

Coordinates (Latitude and Longitude) of these GCP are collected from field using RTK-GPS based fast static survey technique and are stored in WGS84 projection system.

Geo-referencing each of the sheets was done on getting GCP readings from field identify the control points on mouza sheets. The survey team used a separate sheet of mouza maps for taking GCP reading of the respective mouza sheet for future reference.

Total of 48 Ground Control Points were marked in total 12 mouza sheets of Sonatala Upazila.

2.2.2 Design and Construction of Pillars

The BM pillars were constructed as per the design (See figure 2.5). The BM Pillars were constructed as per the approved design with local masons and under constant supervision of consultants and Upazila personnel. Proper curing and construction measure were taken during the construction. Total 05 BM Pillars were established at suitable locations within Sonatala Upazila area to carry out the survey work conveniently. A BM was established in Upazila premises.

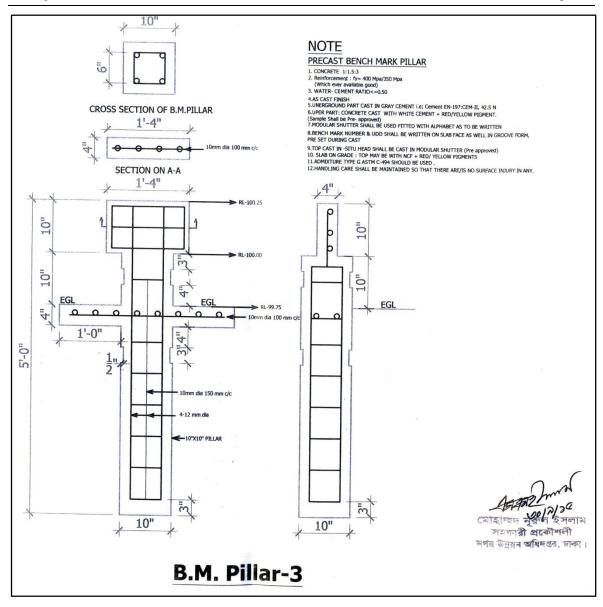


Figure 2. 5: Design of BM Pillars

2.2.3 Construction of BM Pillars

Five (05) BMs are installed within the project area under the supervision of the representation of UDD and the Consultant.





Plate 1: Sample of Constructed BM and Installed BM

2.2.4 Description of Reference BM Pillars

The description of the reference BM Pillar is illustrated in the following table (Table: 2.6) based on the reference value of SOB.

Sl. **Point** Latitude Longitude RL (in Location (WGS 84) No. ID (WGS 84) meter) The Pillar is Situated in 25.02654769002 89.46734454266 the south edge of Baluahat Non-govt. High School's **GPS** compound. 17.792 1. Vill: Baro Northing **Easting** 5170 Balua, Upazila: Sonatala, Dist: Bogra. 2770156.121 748975.252

Table 2. 6: Location of Reference BM

Source: Survey of Bangladesh (SOB), 2016

2.2.5 Baseline Survey by RTK-GPS Method

The engineering survey (Topographic, Physical Features and Land Use Survey) requires a network of permanent Bench Mark (BM). The location and number of BM Pillars were determined through a reconnaissance survey and the consultation of the Mayor of the Sonatala Upazila. The Latitude, Longitude and Elevation of BM Pillars were established through extensive RTK-GPS survey in respect of the Reference BM GPS-5170, established by Survey of Bangladesh (SoB). The location, latitude, longitude and elevation of Reference BM Pillars are presented in Table-2.6 and other BMs are presented in Table 2.7 and locations of BM pillars are shown in Map-2.1.

2.2.6 Establishment of Coordinates (X, Y, Z) for BM Pillars

Ten high performance computers including one laptop, having configuration of Intel Core i5, 2.3 GHz Processor, 4 GB RAM, 1TB HD used to download and post-processing of survey data and present it in GIS layout format.

1st Order BM carry/Level

With the outputs of coordinate of BMs in latitude, longitude and ellipsoidal height from baseline survey results, the vertical datum of SoB BMs are in mMSL. By adding .46m with SoB value the datum has been transferred to mPWD, proposed in ToR. 1st order BM carry/Level was conducted for datum transformation. BMs were painted and coordinates were marked as per Tor specification.

BM **R.L** (m) Easting (dd) Northing (dd) Location No. BM01 17.551 752041.314 2771507.181 Snatala Stadum Sahidminar BM02 17.722 748979.461 2770265.836 Baluahat High School Sonatala BM03 17.918 2766691.469 749157.339 Korpur High School BM04 17.462 752625.298 2765788.272 Jorgacha Union Parisad **BM05** 17.388 758109.885 2765805.850 Pakulla Union Parisad Sonatala

Table 2. 7: Coordinates and Descriptions of the BM Pillars

2.2.7 Marking of BM Pillars

The marking process was comprised of long time observation from Reference BM to other 05 BM Pillars in Sonatala Upazila. 3 hours reading for each of the BM Pillars was used to transfer the coordinates from Reference BM. A highly sophisticated RTK-GPS, Magellan PROMARK3 RTK and a Total Station TOPCON GTS 230 were used for the marking purpose. To get a constant error free reading from the satellites, we kept the base unit of RTK-GPS at the Reference BM and kept the Rover unit of RTK-GPS to each of the Bench Mark Pillars of Sonatala for long time. A sunny day was selected to get best reading. During the process Upazila personnel supported to conduct the tasks.

Table 2. 8: Coordinates and Photographs of the BM Pillars

BM ID	RL (meter MSL)	Easting (dd)	Northing (dd)	Land Mark	BM Photo
BM01	17.551	752041.314	2771507.181	Snatala stadum sahidminar	UDD BM-01
BM02	17.722	748979.461	2770265.836	Baluahat high school Sonatala	UDD BM-02
BM03	17.918	749157.339	2766691.469	Korpur high scool	
BM04	17.462	752625.298	2765788.272	Jorgacha union parisad	
BM05	17.388	758109.885	2765805.850	Pakulla union parisad Sonatala	UDD DM 05



Plate 2: Reference BM Pillar in Sonatala Upazila

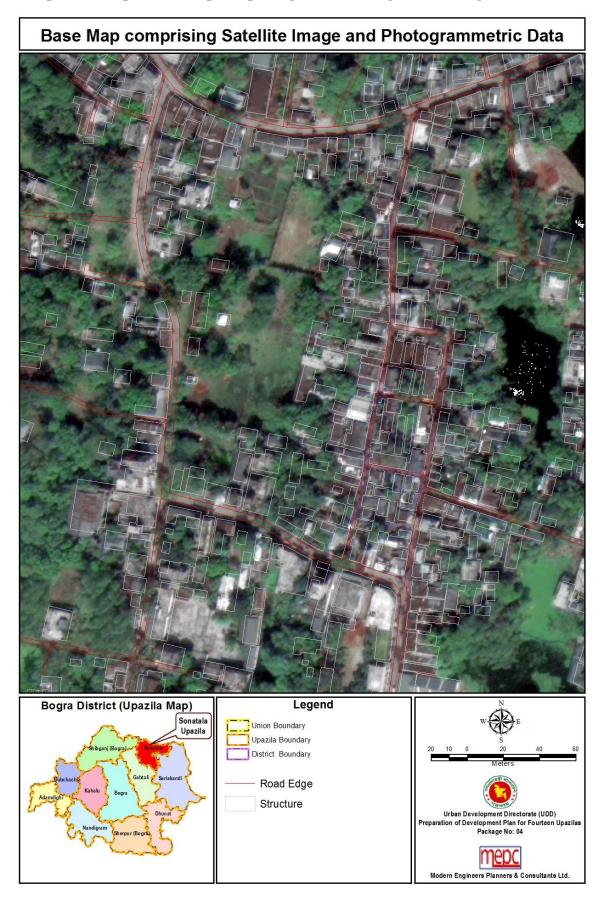


Plate 3: RTK-GPS Observation


BM Location Map of Sonatala Upazila Gabindaganj Shibganj Saghata **BM01** Tekani Chukainagar SOB-5170 Balua **BM03** Digdair Pakulla Jorgacha Sariakandi Gabtali Bangladesh Bogra District (Upazila Map) Legend SOB BM MEPC BM torate (UDD)

Map 2. 1: Location of BM Pillars in Sonatala Upazila

Map 2. 2: Sample Base Map comprising Satellite Image and Photogrammetric Data



Map 2. 3: Sample Base Map comprising Mauza Map and Photogrammetric Data

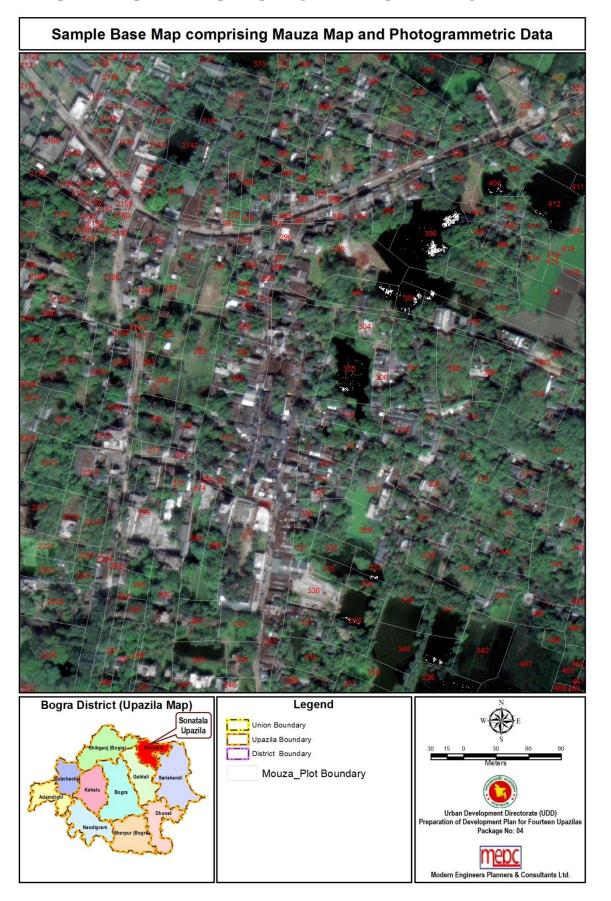

2.3 Satellite Image Processing for Data Acquisition

2.3.1 Physical Feature Extraction from Satellite Image

On collection of raw satellite imagery in stereo pairs, initial image processing has been done by performing Epi-polar Correction, Color Balance, Contrast Adjustment, Sharpening, Pyramid building and Bit Rate Setting. For geometrical correction of satellite images four reliable GCPs has been collected through RTK-GPS survey in the study area. Using these GCPs, Aerial Triangulation of the stereo pairs has done and stereo model has been prepared for photogrammetric works. The detail procedure has been described in the report of Photogrammetric works. The step by step procedures of workflow for stereo satellite image processing and data extraction has been shown in the Figure 2.6.

The Photogrammetric Expert and the GIS Expert were guided the physical feature extraction from satellite image. They monitored the feature extraction works examine the data. After initial image processing and building up of stereo models, extraction of physical features has been done by a team of skilled photogrammetric expert. All type of physical features including Roads, Structures, Water bodies, etc. was extracted as 3D features. Each vertex of features contains z-value (elevation). Plate 4 is showing digitization by digital photogrammetry.



Plate 4: Digitization by Digital Photogrammetry

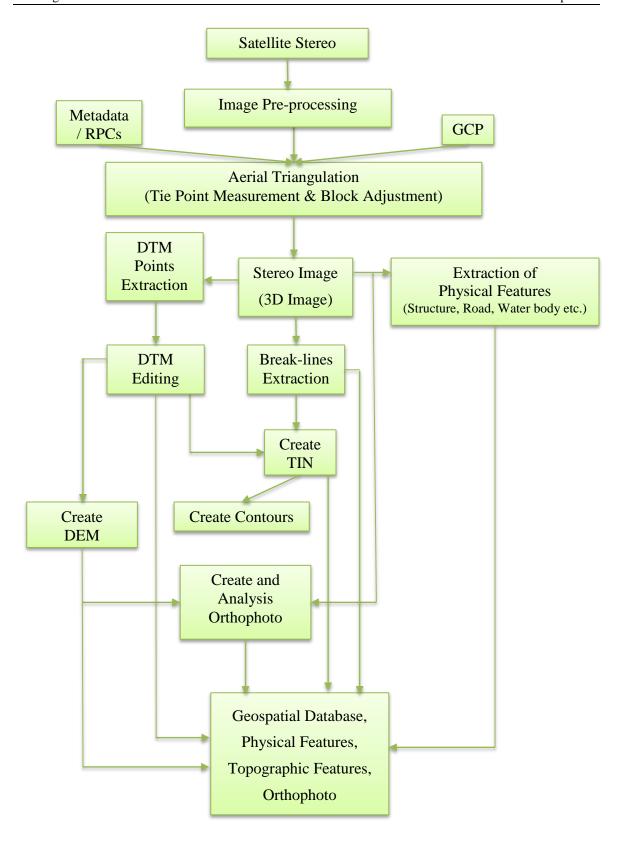


Figure 2. 6: Workflow for Stereo Satellite Image Processing and Data Extraction

2.3.2 Preparation of Survey Base Map

The survey base map has been created by super-imposing Project Area Maps derived from Mauza map and Satellite Image Processed data. This superimposition is very important to form a unique map and database comprising the data collected from satellite imagery and Mauza map data (e.g. plot no, Mauza name, JL no., sheet no.). These base maps have been used to collect attributes of the physical features and missing features which could not be extracted due to dense vegetation in the project area.

Sample of the Grids used to prepare survey base map is shown in Figure-2.7 and Grids with photogrammetric data and satellite image is shown in Figure-2.8. A sample base map comprising photogrammetric data and satellite image is shown in Map-2.4.

Entire Sonatala Upazila has been divided into 1395 grids and survey base maps had been prepared based on these grids. The base maps have been printed on A3 paper sheet at a scale of 1:990 to make sure that all required physical features are visible enough to carry out the survey works. Total 1395 sheets have been prepared and printed. Some grids are not printed located on agricultural land, on large water body or on forest lands as determined by the satellite image.



Figure 2. 7: Grids for Survey Base Maps of Sonatala Upazila

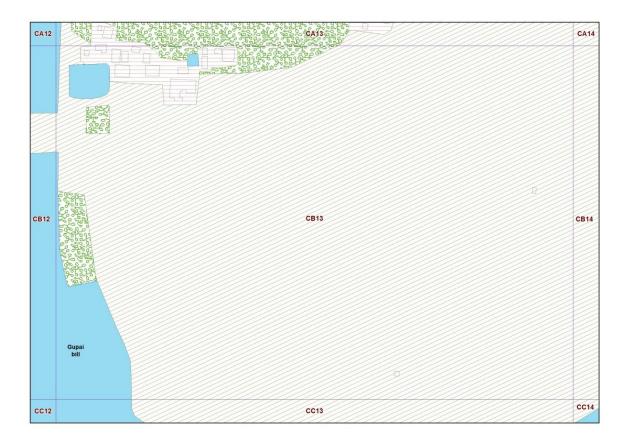


Figure 2. 8: Survey Base Map of Sonatala Upazila in Grids

2.3.3 Preparation of Log Book for Attribute Collection

A Log Book for data collection forms has been developed to collect attributes or textual information. A form of the Log Book is given in Annexure-III. Each page of the book contains columns for collecting following information:

- ✓ Type of structure
- ✓ Use of structure
- ✓ Name of the structure, if any
- ✓ Construction year of the structure
- ✓ Owner of the structure
- ✓ Mobile no. of the owner of the structure, if possible
- ✓ Road name beside the structure, if any
- ✓ Plot no. and Mauza name belongs to the structure
- ✓ Ward/Union belongs to the structure
- ✓ Name of the location

CHAPTER THREE: FIELD LEVEL DATA ACQUISITION

3.0 Mobilization of Survey Team

A highly technical survey team comprising Urban Planner, GIS Expert, Survey Expert and Survey Assistants was mobilized to conduct the topographic and physical feature surveys. The Urban Planner led the survey team under the close supervision of the Team Leader of the project to ensure the quality of the survey. A list of Survey team members has been given in Table 3.1

Table 3. 1: Composition of Survey Team

Sl.	Designation	Nos.	Qualification	Year of Experience	Responsibilities
1.	Urban Planner and Survey coordinator	01	Masters of Urban and Regional Planning	10	Coordination of overall survey work
2.	Survey Expert	01	B.Sc Engineering in Civil	07	To conduct, coordinate and monitor physical feature, topographical and land use, survey
3.	Photogrammetric Expert	01	M.Sc in Geography	06	To prepare topographic, physical feature, land use and other related map of the area
4.	GIS Specialist	01	Bachelor in Geography	06	To prepare, supervise, manage and monitor digital database (Spatial and attribute) of the project
5.	RTK-GPS Surveyor	04	Diploma in Civil Engineering	05	Establishing primary and secondary BM/control points
6.	Total Station Surveyor	12	Diploma in Civil Engineering	05	Topographic and physical feature survey

In addition to above key team members 20 survey assistants were involved for assisting survey team at field level for map checking. For physical survey this survey team was divided into 8 groups contained minimum 2 members (1 Surveyor and one data collector/Logbook writer) to collect all features i.e. structures, water bodies, roads, etc. with their attributes. All these groups were supervised by the Survey Expert and the Survey Supervisor.

3.1 Physical Feature Survey

The Physical Feature survey in Sonatala Upazila was done using the survey base maps as described in previous chapter. Survey team was equipped with hand GPS/ GPS enabled Smart Phone, measurement tape, color pens, maker pens, survey map sheet, log book, etc. They were trained properly before going to field and collect required information. A sample surveyed map sheet is shown in Figure-3.1.



Figure 3. 1: Sample Scanned Base Map for Physical Features and Land Use Survey

The survey team collected the following attributes/information from the field:

- ➤ All structures Position, dimension and number of story
- > Type of structure construction (Pucca, semi-pucca, katcha)
- > Type of structure use (Residential, Commercial, Industrial, Mixed use, etc.)
- Road Network with width and material
- Drainage information with depth, width and construction type with flow direction
- ➤ Bridge/Culverts
- ➤ Other physical infrastructures like, location of deep tubes well, overhead water tank, electric substation, telephone exchange, Water Treatment plant, waste disposal facilities.

A sample page of log book with collected information is shown in Figure-3.2.



Figure 3. 2: Sample Log Book Page with Information Recorded in Field





Plate 5: Surveyors Working on the Field in Sonatala

CHAPTER FOUR: SURVEY DATA PROCESSING & ANALYSIS

4.1 Processing of Spatial and Attribute Data

On completion of field survey, all type of spatial data has been properly processed to obtain layers of physical features such as Structures, Roads, Water bodies, etc. All surveyed sheets are scanned and geo-referenced to superimpose on the satellite imagery. The surveyed features (structures, roads, water bodies, etc.) marked on the sheets were then digitized using the ArcGIS software and stored them layer by layer as per Technical Specifications on GIS Database.



Plate 6: Updating Works through GIS

4.2 Development of GIS Database

A GIS database has developed for systematically organizing, storing and easy retrieving the information and data of the project area. ArcGIS File Geo-database was developed this purpose, since File Geo-database offers structural, performance and data management advantages over Personal Geo-database or shape files. The geo-database contains all the layers generated from the Mauza maps, satellite images and field survey.

Specifications of these layers has been developed to standardize GIS data structure such as layer name, layer type, attribute types and attribute values, and provided in Annexure-II.

The Figure-4.1 is showing Log Book Data Entry Interface in Microsoft Access Software of Sonatala Upazila.

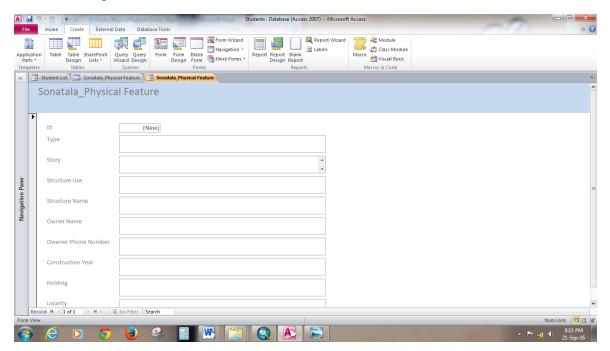


Figure 4. 1: Log Book Data Entry Interface in Microsoft Access Software

The tabular view of Log Book Data Entry in Microsoft Access Software of Sonatala Upazila is shown in Figure-4.2.

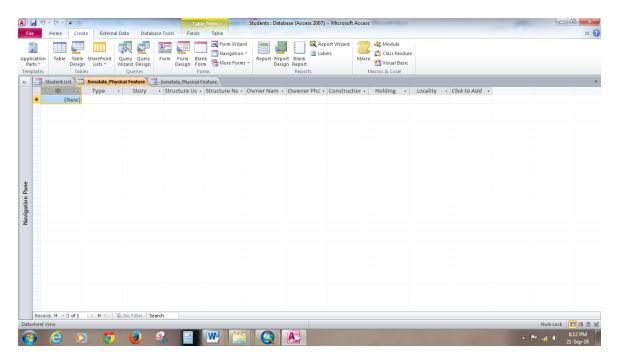


Figure 4. 2: Tabular View of Log Book Data Entry in Microsoft Access Software

The Figure-4.3 is showing Display of Physical Features in Sonatala Town Area.



Figure 4. 3: 3D Display of Physical Features in Sonatala Town Area

The Figure-4.4 is showing Attribute Table of Structure Database of Sonatala Upazila.

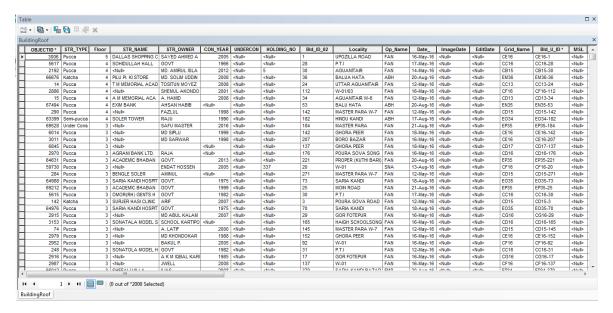


Figure 4. 4: Attribute Table of Structure Database of Sonatala Upazila

The Figure-4.5 is showing Attribute Table of Road Centerline of Sonatala Upazila.

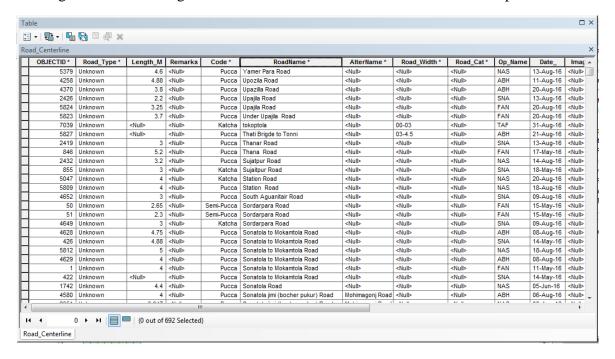


Figure 4. 5: Attribute Table of Road Centerline of Sonatala Upazila

The Figure-4.6 is showing Attribute Table of Mauza Map of Sonatala Upazila.

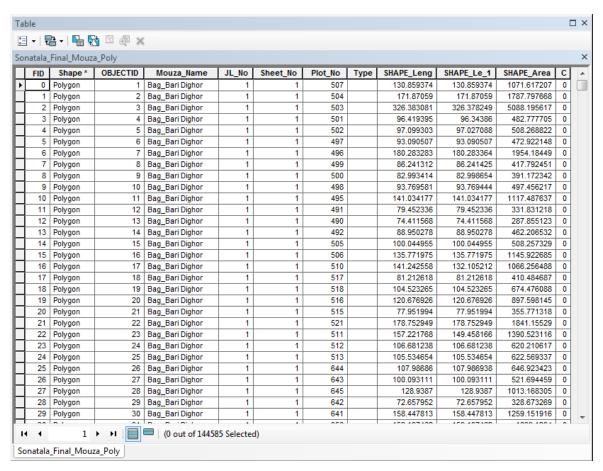


Figure 4. 6: Attribute Table of Mauza Map of Sonatala Upazila

The Figure-4.7 is showing Catalog View of Scanned Mauza Map Files of Sonatala Upazila.

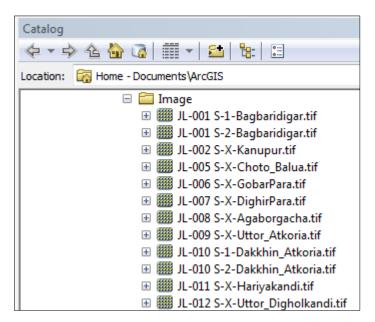


Figure 4. 7: Catalog View of Scanned Mauza Map Files of Sonatala Upazila

The Figure-4.8 is showing Catalog View of Geodatabases of Digitized Mauza Maps of Sonatala Upazila Software of Sonatala Upazila.


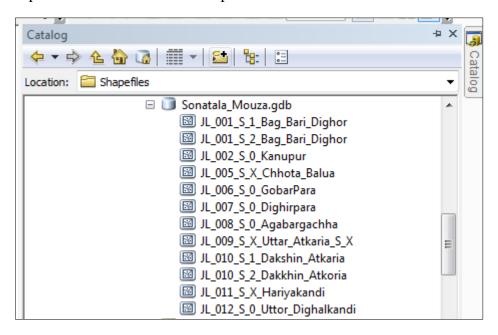


Figure 4. 8: Catalog View of Geodatabases of Digitized Mauza Maps of Sonatala Upazila

Map 4. 1: Structure Use in Sonatala Town Area

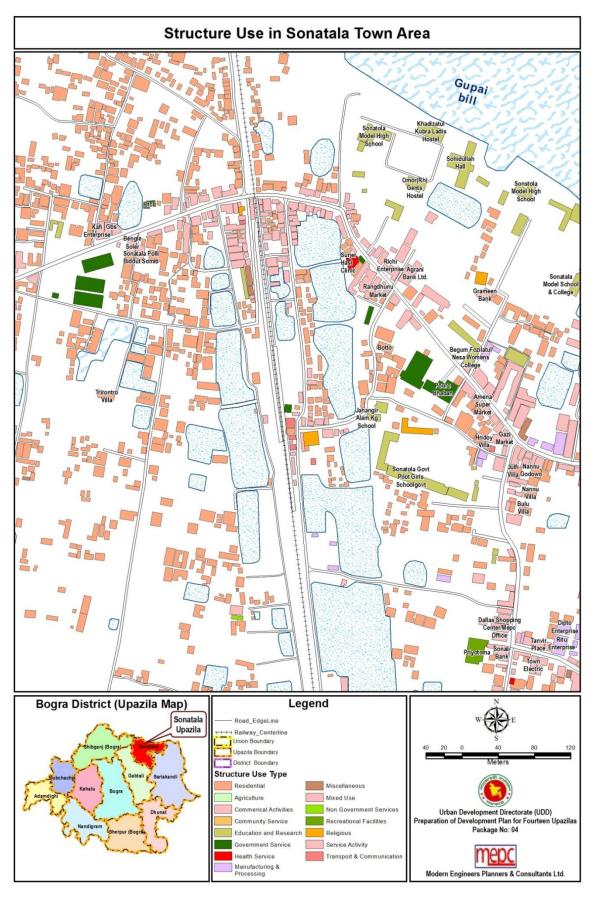

Structure Type and Use in Sonatala Town Area Gupai bill Bogra District (Upazila Map) Legend Sonatala Structure Type Upazila Railway Katcha Semi-pucca Upazila Boundary District Boundary Structure Use Type Residential Agriculture Mixed Use Urban Development Directorate (UDD) ation of Development Plan for Fourteen Upazilas Community Service Recreational Facilities Package No: 04 Religious Government Service Service Activity mepc Health Service Transport & Communication Manufacturing & Processing

Map 4. 2: Structure Type and Use in Sonatala Town Area

CHAPTER-05: WAY FORWARD

The physical feature survey of Sonatala Upazila has been done through field survey based on high resolution stereo satellite imagery and RTK-GPS. By using Digital Photogrammetry technology, physical features have been digitized with 3D coordinates, i.e. every vertex or point has x, y and z-coordinate. This is one of the best technologies for capturing the existing scenario of a site. This physical survey will lead to a dynamic planning process with 3d visualization of the project area. It will be helpful for the development of a realistic plan for this upazila. Physical feature survey information will provide necessary base data for infrastructure, transportation, environmental, hydrological, drainage, land use etc. planning.

References/ Bibliography

- 1. Bangladesh Bureau of Statistics (BBS). (2011). Community Report: Bogra, Population & Housing Census 2011.
- 2. Bangladesh Bureau of Statistics (BBS). (2011). Report of District Statistics 2011; Bogra. GoB.
- 3. http://www.bangladesh.gov.bd/index16f0.html?q=bn
- 4. Sonatola Upazila at a glance, Upazila Office, Sonatola Upazila, 2015.
- 5. http://sonatala.bogra.gov.bd/
- 6. http://www.bbs.gov.bd/
- 7. http://sonatala.bogra.gov.bd/node/1166510/%E0%A6%8F%E0%A6%95-%E0%A6%A8%E0%A6%9C%E0%A6%B0%E0%A7%87-%E0%A6%B8%E0%A7%8B%E0%A6%A8%E0%A6%BE%E0%A6%A4%E0%A6 %B2%E0%A6%BE

Annexure-I: RS Mouza List of Sonatala Upazila

Zila	Upazila	Mouza Name	JL Number	Sheet Number	
Bogra	Sonatala	Acharer Para	91	0	
Bogra	Sonatala	Agabargachha	8	0	
Bogra	Sonatala	Aguanitair	17	1	
Bogra	Sonatala	Aguanitair	17	2	
Bogra	Sonatala	Bag Bari Dighor	1	1	
Bogra	Sonatala	Bag Bari Dighor	1	2	
Bogra	Sonatala	Baliadanga	40	0	
Bogra	Sonatala	Bamniyabor	15	0	
Bogra	Sonatala	Baroghariya	65	0	
Bogra	Sonatala	Bhikaner Para	39	0	
Bogra	Sonatala	Bishurpara	28	0	
Bogra	Sonatala	Bishwanathpur	29	0	
Bogra	Sonatala	Boro Balua	17	1	
Bogra	Sonatala	Boro Balua	17	2	
Bogra	Sonatala	Boyra	71	1	
Bogra	Sonatala	Boyra	71	2	
Bogra	Sonatala	Chak Nandan	24	0	
Bogra	Sonatala	Chamurpara	20	0	
Bogra	Sonatala	Char Chaknandan 30		0	
Bogra	Sonatala	CharalKhadi	74	0	
Bogra	Sonatala	Chatiantola	35	0	
Bogra	Sonatala	Chhota Balua 5		0	
Bogra	Sonatala	Chukainagar	45	1	
Bogra	Sonatala	Chukainagar 45		2	
Bogra	Sonatala	Dakkhin Atkoria	10	1	
Bogra	Sonatala	Dakkhin Atkoria	10	2	
Bogra	Sonatala	Dari hansraj	35	0	
Bogra	Sonatala	Dauder Para	42	0	
Bogra	Sonatala	Dharmakul	56	0	
Bogra	Sonatala	Digdair	66	0	
Bogra	Sonatala	Dighirpara	7	0	
Bogra	Sonatala	Fazilpur	60	1	
Bogra	Sonatala	Fazilpur	60	2	
Bogra	Sonatala	Fulbaria 36		0	
Bogra	Sonatala	GaniyariKandi 72		0	
Bogra	Sonatala	Gar Fatehpur 25		0	
Bogra	Sonatala	Garamara 32		0	
Bogra	Sonatala	GobarPara 6		0	
Bogra	Sonatala			0	
Bogra	Sonatala	1		0	
Bogra	Sonatala	Hariyakandi	11	0	
Bogra	Sonatala	Hashraj	81	0	
Bogra	Sonatala			1	

Zila	Upazila	Mouza Name	JL Number	Sheet Number
Bogra	Sonatala	Huakua	93	2
Bogra	Sonatala	Jantiar Para	43	0
Bogra	Sonatala	Kabilpur	22	0
Bogra	Sonatala	Kamalerpara	22	0
Bogra	Sonatala	Kamar Para	18	1
Bogra	Sonatala	Kamar Para	18	2
Bogra	Sonatala	Kanupur	2	0
Bogra	Sonatala	Katlahar	70	0
Bogra	Sonatala	Khatiamari radhakantopur	106	1
Bogra	Sonatala	Khatiamari radhakantopur	106	2
Bogra	Sonatala	KhodaDilPara	80	1
Bogra	Sonatala	KhodaDilPara	80	2
Bogra	Sonatala	Koalikandi	61	0
Bogra	Sonatala	Kolsadaha	62	1
Bogra	Sonatala	Kolsadaha	62	2
Bogra	Sonatala	Lakshminarayan Para	68	0
Bogra	Sonatala	Lohagara	58	1
Bogra	Sonatala	Lohagara	58	2
Bogra	Sonatala	MadariPara	71	0
Bogra	Sonatala	Madhaya Dighalkandi	78	1
Bogra	Sonatala	Madhaya Dighalkandi	78	2
Bogra	Sonatala	Madhupur	31	1
Bogra	Sonatala	Madhupur	31	2
Bogra	Sonatala	Madhyapara	63	0
Bogra	Sonatala	Mahabbat Para	41	0
Bogra	Sonatala	Mahesh Para	38	0
Bogra	Sonatala	Mahicharan	73	1
Bogra	Sonatala	Mahicharan	73	2
Bogra	Sonatala	Mahishabari	14	0
Bogra	Sonatala	MilonerPara	98	0
Bogra	Sonatala	Mohonpur	46	0
Bogra	Sonatala	Mulbari	59	1
Bogra	Sonatala	Mulbari	59	2
Bogra	Sonatala	NagarPara	16	0
Bogra	Sonatala	Namazkhali	36	1
Bogra	Sonatala	Namazkhali	36	2
Bogra	Sonatala	Nimarapara 57		0
Bogra	Sonatala	Nischintopur	94	0
Bogra	Sonatala	Nowdabga 64		1
Bogra	Sonatala	Nowdabga 64		2
Bogra	Sonatala	E		3
Bogra	Sonatala	Nurar Potol 69 0		
Bogra	Sonatala	Nurpur 67 1 Nurpur 67 2		
Bogra	Sonatala	Nurpur	2	
Bogra	Sonatala	Pada Para	95	1

Zila	Upazila	Mouza Name	JL	Sheet
Ziia	-		Number	Number
Bogra	Sonatala	Pada Para	95	2
Bogra	Sonatala	Pakulla 99		1
Bogra	Sonatala	Pakulla	99	2
Bogra	Sonatala	Pakulla	99	3
Bogra	Sonatala	Paschim Karamja	86	0
Bogra	Sonatala	Paschim Sujatpur	19	0
Bogra	Sonatala	Paschim Takani	82	1
Bogra	Sonatala	Paschim Takani	82	2
Bogra	Sonatala	Pathanpara	64	0
Bogra	Sonatala	Porapaikor	89	0
Bogra	Sonatala	Puglia	13	0
Bogra	Sonatala	Purba Karamja	87	0
Bogra	Sonatala	Purbo Sujatpur	101	1
Bogra	Sonatala	Purbo Sujatpur	101	2
Bogra	Sonatala	Purbo Sujatpur	101	3
Bogra	Sonatala	Purbo Tekani	48	1
Bogra	Sonatala	Purbo Tekani	48	2
Bogra	Sonatala	Purbo Tekani 48		3
Bogra	Sonatala	Ranirpara	21	1
Bogra	Sonatala	Ranirpara 21		2
Bogra	Sonatala	Rashidpur 55		1
Bogra	Sonatala	Rashidpur 55		2
Bogra	Sonatala	Sahabajpr	92	0
Bogra	Sonatala	Sajjan Para	74	0
Bogra	Sonatala	Salika	33	0
Bogra	Sonatala	Satbeki	78	0
Bogra	Sonatala	Sihipur 75		1
Bogra	Sonatala	Sihipur	75	2
Bogra	Sonatala	Soraliya	47	1
Bogra	Sonatala	Soraliya	47	2
Bogra	Sonatala	Uttar Atkaria	9	0
Bogra	Sonatala	Uttar Bashhata	76	0
Bogra	Sonatala	Uttar Gazaria	34	0
Bogra	Sonatala	Uttar Jorgacha 73		1
Bogra	Sonatala	Uttar Jorgacha 73		3
Bogra	Sonatala	Uttar Kalaihata 37		0
Bogra	Sonatala			0
Bogra	Sonatala			1
Bogra	Sonatala			2
Bogra	Sonatala			0
Bogra	Sonatala	3		0

Annexure-II: Technical Specifications of GIS Data

This document contains the technical specifications for the development of GIS database. Specifications for mauza map scanning and digitization have been provided in Section-A and specifications of GIS layers for preparing Survey and Plan Maps have been provided in Section-B.

Section-A: Specifications for Mauza Map Scanning & Digitization

This section contains the scanning specifications and digitization of mauza maps.

A.1.0 Specifications for Mauza Map Scanning

The scanning specification of mauza maps specifies Image Type, Image Format and Image Resolution and Image scale as follows:

Image Type	Color or Grayscale
Image Format	JPEG
Image Resolution	300 dpi

A.1.1 Directory Structure for Storing Scanned Mauza Maps

Directory Structure for systematically storing scanned image files of the Mauza maps are as follows:

Directory	D:\GIS_Data\Project name & Package \ Division name\District						
Structure	name\Upazila name(Data Type)\Union name or Ward No						
	Where,						
	- D:\GIS_Data is the root folder of the UDD's GIS database.						
	- \Project name is the abbreviated name of the Project such as Pkg-						
	5_14Upazila may be the abbreviated name of the project "Preparation of the						
	Development Plan for Fourteen Upazila – Package-05".						
	- \ Division name is the name of the Division in which the project area located.						
	- \ District name is the name of the District in which the project area located.						
	 - \Upazila name is the name of the Upazila in which the project area located. - \Data_Type is the type of GIS data such as Scanned Mauza Maps 						
	Georeferenced Raster Mauza Maps, Survey Data, Proposed Plan Data,						
	etc.						
	- \Union_name is the different name of the Unions of the respective Upazila or						
	Ward number of the Paurashava.						
	Example						
	D:\GIS_Data_UDD\Pkg-						
	5_14Upazila\Chittagong.div\Chittagong.dis\Sonatala.upz\Scanned_Mauza\Son						
	atala.uni\Ward04 is the directory to store the scanned Mauza maps of						
	Ward No-4 of Sonatala Upazila.						

A.1.2 File Naming Convention for Scanned Mauza Maps

A systematic naming convention is followed to name the files of the scanned images of the mauza maps.

File Name: Mauza Name+_+JL no+_+Sheet No.jpg

Where.

- **Mauza Name** is the name of the Mauza. No space or special character is allowed, underscore must be used in case of more than one word in the name.
- **JL no** is the Jurisdiction Line/List number (JL no) of the Mauza. It must be as 3 digit number
- **Sheet No** is the particular sheet number of the Mauza. It must be as 3 digit number

Example:

Mauza Name	JL No	Sheet No	File Name
Garzania	3	5	Garzania_003_005.jpg

A.2.0 Specifications for Mauza Maps Digitization

The specifications for digitization of mauza maps specifies the settings for map and display unit, scale or zoom level and vertex spacing during the process of on-screen digitization.

Map Unit	Inch
Display Unit	Inch
Scale (zoom level)	1: 15 to 30
No of vertices on	- Only 2 vertices along a straight line (or a straight segment of the
linear or polygon	feature)
feature	- Extra vertices are not allowed between Start and End point.
	- Sufficiently dense vertices must be used for curved/complex
	linear feature.
	- Vertex must be inserted at the junction of plot boundaries.
Coordinate System	Unknown (produced by scanning process)

A.2.1 Vector Layers for Mauza Map Digitization

Digitization of Mauza map is done in five vector layers as the format of Shapefile, Coverage or Geodatabase Featureclass. The Geodatabase is preferable..

Features of	Type of	Name of Layer
the Mauza Map	Layer	(as Shapefile/Covergae/Featureclass)
All line features, such as	Polyline	ML_XXX_XXX
plot boundary, road,		Where,
waterbody, building, etc.		-ML represents Mauza map's Line features.
		-XXX represents the JL number of the Mauza
		map (3 digit).
		-XXX represents the Sheet number of the
		Mauza map (3 digit).
Dag number (Plot no)	Point	PN_XXX_XXX
		Where,
		-PN represents Plot Number of the Mauza
		map.
		-XXX represents the JL number of the
		Mauza map (3 digit).
		-XXX represents the Sheet number of the
		Mauza map (3 digit).
Plot area	Polygon	MP_XXX_XXX
		Where,
		-MP represents Mauza map as Polygon (area)
		features.
		-XXX represents the JL number of the
		Mauza map (3 digit).
		-XXX represents the Sheet number of the
		Mauza map (3 digit).
Point features	Point	PF_XXX_XXX
(except plot no)		Where,
		-PF represents Point Features of the Mauza
		map except plot numbers.
		-XXX represents the JL number of the
		Mauza map (3 digit).
		-XXX represents the Sheet number of the
0.1	D 1	Mauza map (3 digit).
Other area features	Polygon	AF_XXX_XXX
		Where,
		-AF represents other Area Features of the
		Mauza map
		-XXX represents the JL number of the
		Mauza map (3 digit).
		-XXX represents the Sheet number of the
]	Mauza map (3 digit).

A.2.2 Attribute Structure of the Mauza Map Layers

Attribute structure of the above four layers are as follows:

1) Layer name: PN_XXX_XXX

Feature Type: Point

This Layer is contain dag number (plot number) of the Mauza maps as point features. It contains the fields as described in the following table:

Field Name	Field	Filed	Purpose of the field
1 1010 1 (dille	Type	Width	Turpose of the field
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Union	String	25	To contain name of the current Union.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-digits)+single space+sheet no(3-digits)
Plot_No	Long Integer	10	To contain dag number (plot number)
Plot_Type	String	20	To contain following plot types - "Plot" - "Katcha Road" - "Semi-Pucca Road" - "Pucca Road" - "Halot" - "Pond" - "Canal" - "River"
Scale	String	20	To contain scale of the Mauza sheet; e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g. CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map.
SV_Period	String	20	To contain survey period of the Mauza map; e.g 1973-85
M_Geocode	String	9	To contain 9-digit BBS Geocode of Mauza as District code+Thana code+Union/Ward code+Mauza code.
UW_Geocode	String	6	To contain 6-digit BBS Geocode of Union or Ward as District code+Thana code+Union/Ward code
Remarks	String	100	To contain remarks, if any.

2) Laye rname: ML_XXX_XXX

Feature Type: Polyline

This shape file/Coverage is contain all line features of the mauza map. It must contain the fields as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Union	String	25	To contain name of the current Union.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-digits)+single space+sheet no(3-digits)
Scale	String	20	To contain scale of the Mauza sheet; e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g. CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map
SV_Period	String	20	To contain survey period of the Mauza map; e.g 1973-85
Line_Code	Short Integer	10	To contain feature code or unique ID of different line feature. For example 11, 12 and 14 are the codes for Mauza boundary, Sheet boundary and Plot boundary respectively.
Line_Desc	String	30	To contain the type of plot boundaries and other line features such as - "Mauza boundary" - "Sheet boundary" - "Plot boundary" - "Katcha Road" - "Semi-Pucca Road" - "Pucca Road" - "Halot" - "Khal" - "Thoka/ Position mark of adjacent sheet" - "North line" - "Other line"
Remarks	String	100	To contain remarks, if any.

3) Layername: MP_XXX_XXX

Feature Type: Polygon

This Layer is contain all the plots of the Mauza maps as area or polygon features. It contains the fields as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Union	String	25	To contain name of the current Union.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-
Dist Nis	T	10	digits)+single space+sheet no(3-digits)
Plot_No	Long Integer	10	To contain <i>dag</i> number (plot number)
Plot_Type	String	20	To contain following plot types - "Plot" - "Katcha Road"
			 "Semi-Pucca Road" "Pucca Road" "Halot"
			- "Pond" - "Canal" - "River"
Scale	String	20	To contain scale of the Mauza sheet; e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g. CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map.
SV_Period	String	20	To contain survey period of the Mauza map; e.g 1973-85
M_Geocode	String	9	To contain 9-digit BBS Geocode of Mauza as District code+Thana code+Union/Ward code+Mauza code.
UW_Geocode	String	6	To contain 6-digit BBS Geocode of Union or Ward as District code+Thana code+Union/Ward code
Remarks	String	100	To contain remarks, if any.

4) Layer name: PF_XXX_XXX

Feature Type: Point

This shape file/Coverage is contain all point features except the plot numbers of the mauza map. It contains the fields as described in the following table:

Field Name	Field Type	Field Width	Purpose of the field
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Union	String	25	To contain name of the current Union.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-digits)+single space+sheet no(3-digits)
Scale	String	20	To contain scale of the Mauza sheet; e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g. CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map.
SV_Period	String	20	To contain survey period of the Mauza map; e.g 1973-85
Point_Code	String	6	To contain the user ID of different point features. For example: 45 is the ID of Traverse Station (New)
Point_Desc	String	50	To contain Point description of point features such as - "Traverse Station [Old]" - "Traverse Station [New]" - GT Station, etc. And also to contain texts of label features of adjacent mauza map such as "Sheet No. 2", "Shaktola No. 101", etc.
Remarks	String	100	To contain remarks, if any.

5) Layername: AF_XXX_XXX

Feature Type: Polygon

This shape file is contain all other area features such as Dalan (Building), Waterbody (Pond), etc. of the mauza map. It contains the fields as described in the following table:

Field Name	Field	Field	Purpose of the field
	Type	Width	
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Union	String	25	To contain name of the current Union.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-digits)+single space+sheet no(3-digits)
Scale	String	20	To contain scale of the Mauza sheet; e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g. CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map.
SV_Period	String	20	To contain survey period of the Mauza map; e.g 1973-85
AF_Code	Long Integer	6	To contain the user ID of different polygon features. For example: 31 is the ID of Permanent Structure (Dalan), 32 is for Tinshed Structure, etc.
AF_Desc	String	50	To contain type of features such as - "Permanent Structure [Dalan]" - "Tinshed Structure" - "Other Structure" - "Pond/Waterbody" - "Pan Baraz" - "Graveyard"
Remarks	String	100	To contain remarks, if any.

A.2.3 Feature Codes for Mauza Map Digitization

The following feature codes (Unique ID) is assigned in fields for digitization of different features of the mauza maps.

Feature Type/Item	Layer Name	Feature Code (ID)
International Boundary		10
Division Boundary		11
District Boundary		12
Upazila Boundary		13
Union Boundary		14
Mauza Boundary		15
Sheet Boundary		16
Plot Boundary		17
Thoka/Adjacent\Match Line		18
Embankment		19
Hill) (I X/X/X/ X/X/X/	20
Road	ML_XXX_XXX	21
Halot		22
Khal (Canal)		23
River		24
Rail Line		25
Slope		26
North Line		27
Pucca Road		28
Semi-Pucca Road		29
Katcha Road		30
Unknown Line		99
Permanent Structure [Dalan]		31
Tin Shed Structure		32
Other Structure		33
Pan Baraz	AF_XXX_XXX	34
Pond/Water Body		35
Graveyard		36
Missing or not readable plot number	PN_XXX_XXX	99999
Boundary Pillar		41
Bench Mark		42
Iron Pillar		43
Traverse Station(Old)		44
Traverse Station (New)		45
GT Station	DE VVV VVV	46
Other Pillars	PF_XXX_XXX	47
Pucca Well		51
Tube Well		52
Mosque		53
Temple		54
Adjacent Mauza/Sheet		61

Feature Type/Item	Layer Name	Feature Code (ID)
Otier Info		62
Demarcation Pillar		71
Settlement Pillar		72
Stone		73
Station		74
Pucca Pillar		75
Municipality Pillar		76
CS Iron Pillar		77
Other Point Feature		88
Plot Boundary		14
Katcha Road		30
Semi-Pucca Road		29
Pucca Road	MI VVV VVV	28
Halot	ML_XXX_XXX	22
Pond		14
Canal		23
River		24

Section-B: Specifications for the Layers of Survey and Plan Maps

This section contains the specifications of all physical features, topographical features and proposed plan features. It specifies the name of the spatial layers and the structure of their attribute tables.

B.1.0 File Naming Convention for GIS Layers

A systematic naming convention is followed to name the layers of the physical, topographical plan features. The name is defined by abbreviated name of the layer with the geocode of the Division+District+upazila (UDD Upazila Master Plan 14 Upazila's) in the following tables:

Sl. No.	Division Name	Division Code	District Name	District Code	Upazila Name	Upazila Code
1	Dhaka	30	Dhaka	26	Nawabganj	62
2	Dhaka	30	Dhaka	26	Dohar	18
3	Chittagong	20	Chittagong	15	Rangunia	70
4	Chittagong	20	Cox bazar	22	Ramu	66
5	Rajshahi	50	Rajshahi	81	Bagmara	12
6	Dhaka		Faridpur	29	Faridpur Sadar	47
7	Dhaka		Mymensingh	61	Ishwarganj	31
8	Dhaka	30	Madaripur	54	Shibchar	87
9	Dhaka		Narsingdi	68	Shibpur	76
10	Dhaka		Narsingdi	68	Raipura	64
11	Rajshahi	50	Bogra	10	Sariakandi	81
12	Rajshahi	30	Bogra	10	Sonatala	95
13	Rangpur	55	Gaibanda	32	Saghata	88
14	Khulna	40	Meherpur	57	Gangni	47

File Name: Layer Name+Division+District+Upazila Geocode will be added with Layer Name such as ADBL306864.

Where,

- Layer Name is the abbreviated name of the layer. No space or special character is allowed.
- **Division Geocode** is the 2-digit BBS Geocode of the Division; eg. Geocode of Dhaka is 30.
- **District Geocode** is the 2-digit BBS Geocode of the Dhaka; eg. Geocode of Narsingdi is 68.
- **Upazila Geocode** is the 2-digit BBS Geocode of the upazila; eg. Geocode of Raipura Upazila is 64.

Example:	
Layer Description	Layer name
Administrative Boundary as line features	ADBL306864
Plots of Merged Mauza maps as polygon features	MMP306864
Plots of Merged Mauza maps as polyline features	MML306864
Plot Numbers of Merged Mauza maps as polyline features	MMN306864
Structures within the project area	STR306864
Existing Roads of the project area as polygon features	RDP306864
Existing Roads of the project area as polyline features	RDL306864
Centerlines of Existing Roads as polyline features	RDCL306864
Footpaths in the project area as polygon features	RDFP306864
Road Islands in the project area as polygon features	RDIL306864
Waterbodies in the project area as polygon features	WBD306864
Embankments in the project area as polygon features	EMB306864
DTM points (Spot Heights) on the project area as point features	DTM306864
BM pillars established in the project area as point features	BM306864
Contour lines of the project area as polyline features	CON306864
Existing Land use of the project area as polygon features	ELU306864
Rural Homestead areas of the project area as polygon features	HOM306864
Bridge, Culvert, etc. of the project area as polygon features	BRG306864
Bridge, Culvert, etc. of the project area as polyline features	BRGL306864
Bridge, Culvert, etc. of the project area as point features	BRGP306864
Existing Drains of the project area as polyline features	DRN306864
Boundary of the project area as polyline features	BW306864
Water Supply pipe lines of the project area as polyline features	WSL306864
Overhead Tanks in the project area as point features	OHT306864
High voltage Electric Supply Lines in the project area as polyline features	ESL306864
Utilities in the project area as point features	UTL306864
Sewerage network lines in the project area as polyline features	SEW306864
Other Polygon features of the project area as polygon features	OP306864
All other Point features of the project area as point features	AP306864
Important names of locations or structures of the project area as point features	NAM306864
Important Road Names in the project area as Annotation/Polyline features	RN306864
Centerlines of Proposed Roads in the project area as polyline features	PRL306864
Union/Ward derived by dissolving merged mauza for Population mapping	POP306864
Proposed policy (Structure Plan) of the project area as polygon features	STP306864

B.1.1 Attribute Structure of the Layers

Attribute structure of the above layers is as follows:

1) Layer name: ADBL306864

Feature Type: Polyline

This Layer is contain administrative boundaries of project area. It contains the fields as described in the following table:

Field Name	Field Type	Field Width	Purpose of the field
Line_Code	Long	10	To Contain Polyline ID
	Integer		
Туре	String	100	To contain the following administrative boundaries
			"International Boundary"
			"Division Boundary"
			"District Boundary"
			"Upazila Boundary"
			"Paurashava Boundary"
			"Union Boundary"
			"Ward Boundary"
			"Mauza Boundary"
			"Sheet Boundary"
			"Plot Boundary"
			"Katcha Road"
			"Semi-Pucca Road"
			"Pucca Road"
			"Halot"
			"Pond"
			"Canal"
			"River"

2) Layer name: MMP306864

Feature Type: **Polygon**

This Layer is contain plots of edge-matched and merged Mauza maps of project area as polygon features. It contains the fields as described in the following table:

Field Name	Field	Field	Purpose of the field
	Type	Width	
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Paurashava	String	25	To contain name of the Paurashava.
Union_Ward	String	25	To contain name of the current Union or Ward No.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-
			digits)+single space+sheet no(3-digits)
Plot_No	Long	10	To contain <i>dag</i> number (plot number)
_	Integer		T ,
Plot_Type	String	20	To contain following plot types
_ 71			- "Plot"
			- "Katcha Road"
			- "Semi-Pucca Road"
			- "Pucca Road"
			- "Halot"
			- "Pond"
			- "Canal"
			- "River"
Scale	String	20	To contain scale of the Mauza sheet;
			e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g.
			CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map.
SV_Period	String	20	To contain survey period of the Mauza map; e.g
_			1973-85
M_Geocode	String	9	To contain 9-digit BBS Geocode of Mauza as
			District code+Thana code+Union/Ward
			code+Mauza code.
UW_Geocode	String	6	To contain 6-digit BBS Geocode of Union or Ward
			as District code+Thana code+Union/Ward code
Land_use	string	50	To contain existing land use as
			- "Administrative"
			- "Agriculture"
			- "Commercial"
			- "Circulation Network"
			- "Institutional"
			- "Flood Flow Zone"

Field Name	Field	Field	Purpose of the field
	Type	Width	
			- "Industrial"
			- "Mixed Use"
			- "Recreational"
			- "Restricted / Special Use"
			- "Socio-Cultural"
			- "Transport & Communication"
			- "Urban Residential"
			- "Urban Services"
			- "Vacant Land"
			- "Water Body"
Single_Crop	string	50	To contain the single crop land
Double_Crop	string	50	To contain the double crop land
Triple_Crop	string	50	To contain triple crop land
Remarks	String	100	To contain remarks, if any.

3) Layer name: MML306864

Feature Type: Polyline

This Layer contains line features of edge-matched and merged Mauza maps of project area as polyline features. It contains the fields as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
ID	Long	16	To Contain Mauza polyline ID.
	Integer		
Type	String	20	"Plot Boundary"
	_		"Sheet Boundary"
			"Mauza Boundary"
			"Katcha Road"
			"Semi-Pucca Road"
			"Pucca Road"
			"Halot"
			"Pond"
			"Canal"
			"River"
Remarks	String	100	To contain remarks, if any.

4) Layer name: MMN306864

Feature Type: **Point**

This layer is contain Plot numbers of edge-matched and merged Mauza maps of project area as point features. It contains the fields as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
Division	String	25	To contain name of the current Division.
District	String	25	To contain name of the current District.
Upazila	String	25	To contain name of the current Upazila.
Paurashava	String	25	To contain name of the Paurashava.
Union_Ward	String	25	To contain name of the current Union or Ward No.
Mauza	String	100	To contain name of the Mauza name
JL_No	String	6	To contain JL Number of the Mauza
Sheet_No	String	6	To contain sheet no the Mauza
Mauza_JL_S	String	100	To contain Mauza name+single space+JLno(3-
			digits)+single space+sheet no(3-digits)
Plot_No	Long	10	To contain <i>dag</i> number (plot number)
	Integer		
Plot_Type	String	20	To contain following plot types
			- "Plot"
			- "Katcha Road"
			- "Semi-Pucca Road"
			- "Pucca Road"
			- "Halot"
			- "Pond"
			- "Canal"
			- "River"
Scale	String	20	To contain scale of the Mauza sheet;
			e.g. "16 inch = 1 mile" or "32 inch = 1 mile", etc.
MZ_Version	String	20	To contain survey version of the Mauza map; e.g.
			CS, RS, BS, etc.
Revenue_No	String	100	To contain revenue number of the Mauza map.
SV_Period	String	20	To contain survey period of the Mauza map; e.g
			1973-85
M_Geocode	String	9	To contain 9-digit BBS Geocode of Mauza as
			District code+Thana code+Union/Ward code+Mauza
			code.
UW_Geocode	String	6	To contain 6-digit BBS Geocode of Union or Ward
			as District code+Thana code+Union/Ward code
Remarks	String	100	To contain remarks, if any.

5) Layer name: STR306864 Feature Type: Polygon

This Layer is contain the information of each structure within the project area. It contains thirteen fields as described in the following table:

Field	Filed	Purpose of the field
Type	Width	
String	25	To contain name of the current Division.
String	25	To contain name of the current District.
String	25	To contain name of the current Upazila
		To contain name of Paurashava.
String	25	To contain name of the current Union\Ward.
Long	16	To Contain Structure ID.
Integer		
Long	10	To Contain the plot No.
Integer		
Double	_	To Contain Structure area in square feet.
String	20	To contain the type of the structure as follows
		- "Pucca"
		- "Semi-pucca"
		- "Katcha"
	-	To contain the number of floors of the structure.
String	100	1. To contain the use (1 st) of the structure.
		2. The attributes should be according to the given
<u> </u>	100	"Existing_Landuse" categories.
		To contain the use (2^{nd}) of the structure.
		To contain the use (3 rd) of the structure.
	100	To contain the name of the structure.
	-	To contain the year of construction.
	2	
String	3	To contain the information if it was being under
		construction during the feature survey.
String	100	- Yes/No; True/False; 1/0 To contain the owner name of the structure.
		To contain the owner Cell No. of the structure.
	+	To contain the structure use of the Government or
Sumg	100	private and so on.
String	100	To contain the picture of the structure.
		To contain Holding number of the structure.
	-	To contain adjacent road number, It must be follow
Sumg		of the Road Categories.
~ .	100	
String	100	To contain the name of the nearby road
	String String String String Long Integer Long Integer Double	Type Width String 25 String 25 String 25 Long 16 Integer 10 Long 10 Integer 20 Short - Integer - String 100 String 100 String 100 String 3 String 100 String 100 String 100 String 100 String 50 String 50

6) Layer name: RDP306864 Feature Type: Polygon

This Layer is contain the existing roads of the project area as polygon features. It contains three fields as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
Road_name	string	100	To contain the name of the road, if any
Road_ID	string	20	To contain the ID of Road
Road_type	string	20	To contain the physical type of the road as follows
			- "Pucca"
			- "HBB"
			- "Katcha"
Road_Class	string	100	To contain the Class of road according to RHD &
			LGED in the followings:
			_
			RHD Road Class
			- "National Highways"
			- "Regional Highways"
			- "District∖Zila Road"
			LGED Road Class
			- "Upazila Road(Pucca"
			- "Upazila Road(Katcha)"
			- "Union Road(Pucca)"
			- "Union Road(Katcha)"
			- "Village Road A (Pucca)"
			- "Village Road A (Katcha)"
			- "Village Road B (Pucca)"
			- "Village Road B (Katcha)"

7) Layer name: **RDL306864** Feature Type: **Polyline**

This Layer is contain the existing roads of the project area as polyline features. It contains three fields as described in the following table:

Field Name	Field Type	Field Width			Purpose of	Purpose of the field		
Road_name	string	100	То сог	To contain the name of the road, if any				
Road_ID	string	20	То сог	ntain the	e ID of Road			
Road_Type	string	20	To cor - "Puc - "WB - "HB	ca" 8M" B"	e physical typ	e of the ro	ad as follows	
Road_Class	string	100	To con LGED RHD	ntain the lin	followings: lass onal Highway onal Highway ict\Zila Road	ca" cha)" ha)" catcha)" Vucca)"	ing to RHD &	
	To prep	pare the	Cha	nge				
	inventory			eters	Road	Т	Additional	
	Electricity,		Fro m	To	Condition	Type	+Field	
	Sewerage, and et inventory	pipe line c. The will help	0	500	Pucca	Pucca	To add more field as per Required.	
Remarks	for the present status of features. Please follow the example		500	504	Culvert	Culvert	To add more field as per Required.	
	right side of Table.	of the Data	504	1000	Katcha	Katcha	To add more field as per Required.	
			1000	1012	Bridge	Bridge	To add more field as per Required.	

8) Layer name: RDCL306864

Feature Type: Polyline

This shape file is contain the centerlines of the existing roads of the project area as polyline features. It contains the following fields compatible to network analysis:

Field Name	Field	Filed	ng fields compatible to network analysis: Purpose of the field
	Type	Width	F 000 00 000 000 000 000 000 000 00
Road_name	string	100	To contain the name of the road, if any
Road_no	string	20	To contain road number, if any
Road_ID	string	20	To contain the ID of Road
Road_type	string	20	To contain the physical type of the road as
			follows
			- "Pucca"
			- "WBM"
			- "HBB"
		100	- "Katcha"
Road_Class	string	100	To contain the Class of road according to RHD
			& LGED in the followings:
			DUD D. 1 Cl
			RHD Road Class
			- "National Highways"
			- "Regional Highways"- "District\Zila Road"
			LGED Road Class
			- "Upazila Road(Pucca"
			- "Upazila Road(Katcha)"
			- "Union Road(Pucca)"
			- "Union Road(Katcha)"
			- "Village Road A (Pucca)"
			- "Village Road A (Katcha)"
			- "Village Road B (Pucca)"
			- "Village Road B (Katcha)"
Road width	numeric		To contain average width of the road segment in
			meter
Road_length	numeric		To contain calculated length of the road segment
_ 0			in meter
Num_Lanes	numeric		To contain number of lanes on the road segment
			such as 1, 2, etc.
Road_own	string	100	To contain the name of the department or
			organization to which the road segment belongs.
METERS	Double	-	To contain length of the road in meters
FT_MINUTES	Float	-	To contain the time duration needed to travel the
			arc from the start node unto the end node,
			measured in minutes.
TF_MINUTES	Float	-	To conation the time duration needed to ravel the
			arc from the end node unto the start node of the
			arc, measured in minutes,
Oneway	string	2	To contain the value to represent the possible
			directions to travel an arc

Hierarchy	Long	То	contain	order	or	rank	assigned	to	road
		network elements.							

9) Layer name: RDFP306864

Feature Type: Polygon

This Layer is contain footpath of project area. It must contain the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Road_name	string	50	To contain road name
Road_ID	string	20	To contain the adjacent Road ID
Width	numeric		To contain width of Footpath
Status	string	50	To contain footpath conditions.

10) Layer name: RDIL306864

Feature Type: Polygon

This Layer is contain road islands of the project area. It must contain the fields as

described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Road_name	string	50	To contain road name
Road_No	string	20	To contain road number if any
Road_ID	string	20	To contain the adjacent Road ID
Width	Long integer	20	To contain width of Island
Type	string	50	To contain footpath conditions.

11) Layer name: WBD306864

Feature Type: Polygon

This shape file is contain water bodies of project area. It must contain the field as

described in the following table:

Field Name	Field Type	Field Width	Purpose of the field
WBD_ID	Long integer	20	To contain Water body ID.
Туре	string	50	To contain following type of water bodies - "River" - "Khal" - "Irrigation Canal" - "Swamp" - "Pond" - "Ditch" - "Borrow Pits"
Туре	string	50	To contain the use of water body such as Private or Public use

12) Layer name: **EMB306864** Feature Type: **Polyline**

reactive Type. Tolymic

This Layer is contain embankment features of project area. It contains the field as described in the following table:

described in the following tuble.			
Field Name	Field Type	Filed Width	Purpose of the field
Emb _name	string	100	To contain the name of the road, if any
Emb_ID	string	20	To contain the ID of Road
Emb_Type	string	20	To contain the physical type of the Embankment to follow the road preparing method.
Emb_Class	string	100	To contain the Class of the Embankment -"Road cum Embankment" -"Embankment"
Emb_width	numeric		To contain average width of the road segment in meter
Emb _width	numeric		To contain average width of the embankment segment in meter
Emb _length	numeric		To contain calculated length of the road segment in meter
Num_Lanes	numeric		To contain number of lanes on the road segment such as 1, 2, etc.
Owner	string	100	To contain the name of the department or organization to which the embankment segment belongs.
Remarks			To follow the Road preparing Methods.

13) Layer name: DTM306864

Feature Type: Point

This shape file is contain spot heights as 3D points at regular interval (10m x 10m OR 20m x 20m or as specified) in project area. It containd four fields as described in the following table:

Field Name	Field Type	Filed Width	No. of Decimal Places	Purpose of the field
ID	Sort	10		To contain the ID
	Integer			
RL	Double	-	-	To contain Reduced Level (RL) of a
				point in meter as referenced with PWD
Easting	Double	-	-	To contain X-coordinate of the point
Northing	Double	-	-	To contain Y-coordinate of the point

14) Layer name: BM306864

Feature Type: Point

This shape file is contain BM Pillars established in the project area. It contains four fields as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
RL	Double	-	To contain Reduced Level (RL) of a point in
			meter as referenced with PWD
Easting	Double	-	To contain X-coordinate of the point
Northing	Double	-	To contain Y-coordinate of the point
Organization	String	100	To contain name of the organization
Cons_Year		10	To contain the year of construction
Remarks	String	100	To contain remarks, if any.

15) Layer name: CON306864

Feature Type: Polyline

This shape file is contain the contour lines of the area under project area. It contains three fields as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Contour	Double	-	To contain the value (RL) of the contours up to three
			decimal places.
Label	Double	-	To contain the value of contour up to one decimal place.
			This can be used to label the contours in map.
Type	String	7	To contain the value of this field as follows:
			- "Index"
			- "Intermediate"
			The purpose of this field is to symbolize and label the
			contours only. (The values must be calculated in such way
			that after successive 4 thin (Regular) contours there should
			be one thick (Index) contour in map. That is if 0.00 is a
			thick (Index) contour then 0.3, 0.6, 0.9, and 1.2 will be
			(Regular) contours and 1.5 will be thick contour.

16) Layer name: ELU306864

Feature Type: Polygon

This shape file is contain existing land use of project area which will be prepared on the basis of physical feature and land use survey. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Land_use	string	50	To contain existing land use as
			- "Administrative"
			- "Agriculture"
			- "Commercial"
			- "Circulation Network"
			- "Institutional"
			- "Flood Flow Zone"
			- "Industrial"
			- "Mixed Use"
			- "Recreational"
			- "Restricted / Special Use"
			- "Socio-Cultural"
			- "Transport & Communication"
			- "Urban Residential"
			- "Urban Services"
			- "Vacant Land"
			- "Water Body"
Single_Crop	string	50	To contain the single crop land
Double_Crop	string	50	To contain the double crop land
Triple_Crop	string	50	To contain triple crop land
Remarks	string	100	To contain remarks, if any.

17) Layer name: HOM306864

Feature Type: Polygon

This shape file is contain rural homestead areas in project area as polyline features. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Location	String	20	To contain the name of Mauza (Mauza_JL_Sheet) or
			the locality in which homestead areas lies.
Type			To contain the type of homestead area (Accordingly
			structures)
			-Urban
			-Rural

18) Layer name: BRG306864

Feature Type: Polygon

This shape file is contain Bridge/Culvert/Box culvert/Over bridge/Railway Bridge etc as polygon features in project area. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Length	Double	0	To contain the length of the bridge/culvert
Width	Double	0	To contain the width of the bridge/culvert
Abutment	Long integer	20	To contain the number of abutment
Span	Double	0	To contain the span of the bridge/culvert
Location	String	30	To contain the area name (Mauza_JL_Sheet or locality)
Remarks	String	254	To contain comments about the bridge such as conditions of abutment, deck, wing wall, etc.
			*** To follow the road map preparing methods.

19) Layer name: BRGL306864

Feature Type: Polyline

This shape file is contain Bridge/Culvert/Box culvert/Over bridge/Railway Bridge etc as polyline features in project area. Each feature must be a multipart feature. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Length	Double	-	To contain the length of the bridge/culvert
Width	Double	-	To contain the width of the bridge/culvert
Abutment	Double	-	To contain the number of abutment
Span	Double	-	To contain the span of the bridge/culvert
Location	String	20	To contain the area name (locality)
Remarks	String	254	To contain comments about the bridge such as conditions of abutment, deck, wing wall, etc. *** To follow the road map preparing methods.

20) Layer name: BRGP306864

Feature Type: Polygon

This shape file is contain Bridge/Culvert/Box culvert/Over bridge/Railway Bridge etc as point features in project area. It is expected that this shape file will be generated/produced from converting the Bridge_CL.shp file into centroids. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Length	Double	-	To contain the length of the bridge/culvert
Angle			To contain the Geographic angle of the bridge/culvert
Width	Double	-	To contain the width of the bridge/culvert
Abutment	numeric	20	To contain the number of abutment
Span	Double	-	To contain the span of the bridge/culvert
Location	String	20	To contain the area name (Mauza_JL_Sheet or locality)
Remarks	String	254	To contain comments about the bridge such as conditions of abutment, deck, wing wall, etc. *** To follow the road map preparing methods.

21) Layer name: DRN306864

Feature Type: Polyline

This shape file is contain the information of existing drains in the project area. It contains three fields as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Type	string	20	To contain the (construction) type of the drain. The
			value of the field may be any of the following two
			- Surface (Katcha)
			- Surface (Uncovered)
			- Surface (Covered)
			- Pipe
Drain_width	Double	0	To contain the width of the drain
Drain_depth	Double	0	To contain the depth of the drain
Drain_radius	Double	0	To contain the radios of the drain
Road_ID	string	20	To contain the adjacent Road ID
Remarks	String	254	*** To follow the road map preparing methods.

22) Layer name: **BW306864** Feature Type: **Polyline**

This shape file is contain boundary walls as line features of project area. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Type	string	50	To contain line features such as Boundary wall.

23) Layer name: WSL306864

Feature Type: **Polyline**

This shape file is contain water distribution pipe network as line features in project area. It contains the field as described in the following table:

Field	Field	Filed	Purpose of the field
Name	Type	Width	
Type	string	20	To contain type of pipe (Steel, PVC, etc)
Dia	Double	0	Diameter of pipe in mm
Remarks	String	254	*** To follow the road map preparing
			methods.

24) Layer name: OHT306864

Feature Type: **Point**

This shape file is contain overhead water tanks as point features in project area. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Capacity	Double	-	To contain the capacity of the overhead tank.
Catchment	Double	-	To contain the catchment area in sq. meter
Owner	String	100	Contains the owner name

25) Layer name: **ESL306864** Feature Type: **Polyline**

This shape file is contain High Voltage Electric Lines as line features in project area. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
capacity	string	20	Contains the capacity of each line as 11KV, 33 KV etc.
Owner	string	20	Contains the name of Organization
Remarks	String	254	*** To follow the road map preparing methods.

26) Layer name: UTL306864

Feature Type: Point

This shape file is contain locations of various utility features as described in the following table:

Field	Field	Filed	Purpose of the field
Name	Type	Width	
Type	string	20	To contain
			- "Electric Pole"
			- "Electric Tower"
			- "High Volt Electric Tower"
			- "Electric Box"
			- "Power Station"
			- "Power Sub-station"
			- "Transformer"
			- "Gas Transmission Center
			- "Light Post"
			- "Telephone Pole"
			- "Telephone Box"
			- "Fire Service Station"
			- "Traffic Signal Pole"
Owner			Contains the name of the owner
Remarks	String	100	*** To follow the road map preparing
	_		methods.

27) Layer name: **SEW306864** Feature Type: **Polyline**

This shape file is contain sewerage network as line features in [project area. It contains the field as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
Size	string	20	To contain pipe diameter of sewerage line
Type	string	25	Contains type of waste water carried by the sewerage line such as storm sewerage or household sewerage line etc.
Location	string	20	Contains location of sewerage line
Owner			Contains the name of the owner
Remarks	String	100	

28) Layer name: **OP306864** Feature Type: **Polygon**

This shape file is contain various polygon features of project area. It contains the field as described in the following table:

Field Name	Field	Filed	Purpose of the field
	Type	Width	
Type	string	50	To contain boundary of following features
			- "Graveyard"
			- "Crematorium"
			- "Cemetery"
			- "Eidgah"
			- "Restricted Area"
			- "Airport"
			- "Brick Field"
			- "Rikshaw Garage"
			- "Automobile Garage"
			- "Slum"
			- "Monument"
			- "Open Space"
			- "Parks"
			- "Playground"
			- "Stadium"
			- "Golf Course"
			- "Botanical Garden"
			- "Zoological Park"
			- "Power Plant/Station"
			- "Bus Terminal"
			- "Truck Terminal"
			- "Water Treatment Plant"
			- "Sewerage Treatment Plant"
			- "Waste Disposal Plant"
l			- "Railway Station"

	- "Bazaar Boundary"
	- "Forest Land"
	- "Sand Fill"
	- "Swimming Pool"
	Other if necessary
Owner	Contains the name of the owner

29) Layer name: AP306864

Feature Type: Point

This shape file is contain point features of project area. It contains the field as described in the following table:

Field	Field	Filed	Purpose of the field
Name	Type	Width	
Type	string	50	- "Airport"
			- "Bazar"
			- "Government Bank"
			- "Private Bank"
			- "Brickfield"
			- "Bridge"
			- "Bus Terminal"
			- "Cemetery"
			- "Church"
			- "Cinema Hall"
			- "College"
			- "Crematorium"
			- "Deep tube well"
			- "Dustbin"
			- "Filling Station"
			- "Graveyard"
			"Growth Center"
			- "Hand tube well"
			- "Historic site"
			- "Government High School"
			"Registered High School"
			"Non-Registered High School"
			- "Hospital/Clinic"
			- "Madrasa"
			- "Registered Madrasa"
			- "Non-Registered Madrasa"
			- "Mazar/Dargah"
			- "Monument"
			- "Mosque"
			- "Museum"
			- "Oil Reservoir/Depot"
			- "Over Bridge"
			_
			- "Pagoda" - "Police Box"
			- "Police Station"
			- "Post Office"
			- "River Port" "Covernment Primary Sahaal"
			- "Government Primary School"
			- "Registered Primary School"
			- "Non-Registered Primary School"

Field	Field	Filed	Purpose of the field
Name	Type	Width	
			- "Sluice gate"
			- "Temple"
			- "Theater Hall"
			- "Truck Terminal"
			- "Under Pass"
			- "University"
			- "Private University"
			- "Well"
			- "Culvert"
			- Other if necessary
Name	string	50	To contain name of the feature, if any
PF_ID	Long	6	To contain the point feature ID.
	integer		
Point Type	string	50	To contain short name "GPS" of the feature, e.g.
			Government Primary School (GPS)
Owner			Contains the name of the owner
Remark	string		Contains Further Explanation

30) Layer name: NAM306864

Feature Type: Point

This shape file is contain the names of important places and structures as point features in project area.

Field Name	Field Type	Filed Width	Purpose of the field
Name	String	100	To contain - Name of locality, market, bazaar, important structure, historic site, university, play ground, poultry farm, river, khal, lake, pond, etc.

31) Layer name: RN306864

Feature Type: Annotation/Polyline

This shape file is contain the names of important places and structures as point features in project area.

Field Name	Field Type	Filed Width	Purpose of the field
Name	String	100	To contain the name of road segment.

32) Layer name: **PRL306864** Feature Type: **Polyline**

This shape file is contain center lines of proposed roads as line features in the project area.

Field Name	Field Type	Filed Width	Purpose of the field
Width_m	Double	-	To contain width of the proposed road in meter
Width_ft	Double	-	To contain width of the proposed road in foot
From_To	String	100	To contain the names (of road/place) from where the road starts and to where the road ends.
Prop_type	String	20	To contain any of the two - "New" - "Widening"
Туре	String	20	To contain any of the following - "Underground" - "Ground" - "Flyover" - "Viaduct"
Remarks	String	254	*** To follow the road map preparing methods.

33) Layer name: **POP306864** Feature Type: **Polygon**

This shape file is contain polygon features of unions/wards derived from dissolved Mauzas of the project area. It contains the field as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Union_Ward	String	50	To contain name of the Mauza
Area_BBS	Double	-	To contain area from BBS records
Area_GIS	Double	-	To contain area calculated by GIS software
Pop_2001	Long Integer	-	To contain Population in the year 2001
Pop_2011	Long Integer	-	To contain Population in the year 2011
Pop_2021	Long Integer	-	To contain Population in the year 2021
Pop_2035	Long Integer	-	To contain Population in the year 2035
Pop_den_2011	Double	-	To contain population density
Division	String	25	To contain name of Division
District	String	25	To contain name of District
Upazila	String	25	To contain name of Upazil;a
Union_Ward	String	25	To contain name of Union/Ward
Geocode	String	11	To contain BBS geocode of the Union
Remarks	String	254	Remarks, if any.

34) Layer name: **STP306864** Feature Type: **Polygon**

This shape file is contain proposed policy on the merged Mauza map of the project area. It contains the fields as described in the following table:

Field Name	Field Type	Filed Width	Purpose of the field
Policy_Zone	String	50	To contain proposed policy on the plots.
Remarks	String	100	To contain remark, if any.

B.1.2 Point Feature Codes

The following feature codes (Unique ID) must be assigned in appropriate fields of the layers.

The following Point feature codes (Unique ID) will be used as follows.

Point Feature Categories	Unique ID
- "Airport"	255
- "Bazar"	260
- "Government Bank"	265
- "Private Bank"	270
- "Brickfield"	275
- "Bridge"	280
- "Bus Terminal"	285
- "Bus Stand"	290
- "Cemetery"	295
- "Church"	300
- "Cinema Hall"	305
- "Government Medical College"	245
- "Private Medical College"	250
- "Government College"	145
- "Government Woman College"	150
- "Registered College"	155
- "Non-Registered College"	160
Government Poly Technical Institute	165
Private Poly Technical Institute	170
Vocational Institute	175
Jubo Unnayan Kendra	310
Government Teacher's Training College	235
Private Teacher's Training College	240
- "Crematorium"	315
- "Deep tube well"	320
- "Dustbin"	325
- "Filling Station"	330
- "Graveyard"	335
"Growth Center"	340
- "Hand tube well"	345
- "Arsenic Hand tube well"	350
- "Tara Pump"	355
- "Historic site"	360
- "Government High School"	125
- "Government Girl's High School"	130
"Registered High School"	135
"Non-Registered High School"	140
- "Hospital/Clinic"	365
- "Government Kamel Madrasa"	180
- "Registered Kamel Madrasa"	185
- "Government Fazel Madrasa"	190

int Feature Categories	Unique ID
- "Registered Fazel Madrasa"	195
- "Government Alem Madrasa"	200
- "Registered Alem Madrasa"	205
- "Government Eftedayee Madrasa"	210
- "Registered Eftedayee Madrasa"	215
- "Non-Registered Madrasa"	220
- "Mazar/Dargah"	370
- "Monument"	375
- "Mosque"	380
- "Museum"	385
- "ASA NGO"	390
- "BRAC NGO"	395
- "Proshikha NGO"	400
- "TMSS NGO"	405
- "Other's NGO"	410
- "Insurance Company"	415
- "Life Insurance Company"	420
- "Oil Reservoir/Depot"	425
- "Over Bridge"	430
- "Pagoda"	435
- "Police Box"	440
- "Police Station"	445
- "Post Office"	450
- "River Port"	455
- "Government Primary School"	100
- "Registered Primary School"	105
- "Non-Registered Primary School"	110
- "K.G. School"	115
- "Kindergarten School"	120
- "Sluice gate"	460
- "Temple"	465
- "Theater Hall"	470
- "Truck Terminal"	475
- "Under Pass"	480
- "Government University"	225
- "Private University"	230
- "Well"	485
- "Culvert"	490
- Other if necessary	To put or add the Unique ID
, ,	accordingly 5 interval

Annexure-III: Structure Attribute Collection Form

Upazila: Union:	Urban Development Directorate (UDD)	Date:	
Ward No:	Ministry of Housing and Public Works "Preparation of Development Plan for 14 Upazilas" Project (Package-4)	Name of the	
Grid ID:	Physical Feature and Land Use Survey	[N	
Data Type: Structure		Name of	

ID	Туре	Storied	Structure Use	Structure Name	Owner Name	Owner Cell No	Construction	Holding	Locality
								2 6	
	-		1		+				1
			-		*				+
	3)				+				
					ĺ				
			-		*			9	5
		_			-				
			3		5				7
	-		1		-			2	1

Code of Structure Type: P= Pucca, SP= Semi Pucca, K= Katcha

Code of Structure Use: R= Residential



Government of the People's Republic of Bangladesh

Ministry of Housing and Public Works **Urban Development Directorate (UDD)**

Preparation of Development Plan for Fourteen Upazilas

Package-04

(Saghata Upazila, District: Gaibandha; Sariakandi Upazila and Sonatala Upazila, District: Bogra)

FINAL SURVEY REPORT

TOPOGRAPHIC SURVEY
Of
Saghata Upazila, Gaibandha

June, 2017



Table of Contents

			Page No.				
Table	e of Conte	nts	i				
List	of Tables		ii				
List o	of Maps		ii				
СНА	PTER O	NE: INTRODUCTION	1				
1.1	Backgr	round	1				
СНА	PTER T	WO: METHODOLOGY	3				
2.1	Recon	naissance Survey	3				
2.2	Compi	Compilation and Preparation of Base Map					
	2.2.1	Project Area Based on Mauza Maps	3				
	2.2.2	Satellite Image Processing	3				
	2.2.3	Topographic Feature Extraction from Satellite Image	4				
СНА	PTER TI	HREE: TOPOGRAPHIC DATA ACQUISITION	6				
3.1	Mobili	zation of Survey Team	6				
3.2	Topog	raphic Survey	6				
СНА	PTER FO	OUR: DATA PROCESSING AND ANALYSIS	8				
4.1	Genera	al Topography of Saghata Upazila	8				
4.2	Topog	Topographic Survey Findings					
	4.2.1	Spot Level Data	8				
	4.2.2	General Contour Description	8				

MEPC i

List of Tables

		Page No.
Table 3.1	: Topographic Survey	6
Table 4.1	: Summary of Spot Level Data of Saghata	8
Table 4.2	: Summary of Contour Line Data of Saghata	8
	List of Mons	

List of Maps

		Page No.
Map 1.1	: Project Area Map of Saghata Upazila	2
Map 4.1	: Contour Map of Saghata	9
Map 4.2	: Surface Analysis of Saghata Upazila	10

MEPC ii

CHAPTER ONE: INTRODUCTION

1.1 Background

Topographic survey is a survey that measure the surface of the earth of any area with standard known coordinates of X, Y, Z value. Topographic survey is a very important survey as it shows terrain, the three dimensional quality of the surface, and the identification of specific landforms for future development. A detailed topographic survey was conducted in Saghata in the survey phase for the "Preparation of the Development Plan for Fourteen Upazilas" project. This report contains the survey procedures along with findings and analysis of the topography of the project area. The survey was conducted according to the ToR of the project. Topographic features have been extracted by DTM point extraction, Break-line extraction, Water bodies extraction, Generation of DEM/TIN. A map of the study area in shown below.

Project Area Map of Saghata Upazila Gaibandha Palasbari Padumsahar Fulchhari Bhartkhali Muktanagar Dewanganj Saghata Ghuridaha Gobindaganj Islampur Kamaler Haldia Jumarbari Sonatala Sariakandi Bangladesh Gaibandha District Legend Gaibandha District (Upazila Map) Upazila Boundary District Boundary Urban Development Directorate (UDD)
Preparation of Development Plan for Fourteen Upazilas Saghata Upazila odern Engineers Planners & Consultants Ltd

Map 1.1: Project Area Map of Saghata Upazila

Source: MEPC

CHAPTER TWO: METHODOLOGY

2.1 Reconnaissance Survey

A field visit was conducted in the upazila areas by a team of Team Leader, Urban planner and urban economist to identify the urban growth factors and potentialities, orderly growth of urban areas, trends of urban growth and expansion of town through observation and consultation with the Upazila authorities and local people. During the visits maps and drawings were consulted in order to identify the national and regional setting, assess the topographical and physical features, acquaint with the changes of the areas, direction of present development and potentialities of future development etc. The purpose of the visits is to provide a context for the future potentialities of development of the town. During visits following points are considered to develop a profile of the Upazila.

- Identify the urban growth factors and potentialities
- Identify the orderly growth of urban areas
- Assess the trends of urban growth and expansion of town.

2.2 Compilation and Preparation of Base Map

Preparation of base map is an important requirement for planning the project area. The base map was used to depict the survey findings. The steps for the preparation of base map are described in the Physical Feature Survey Report.

2.2.1 Project Area Based on Mauza Maps

Project area boundary and other boundaries have been derived by processing of Mauza maps which is described in detail in the Physical Feature Survey Report. From the mosaic Mauza map of the project area, the administrative boundaries such as District boundary, Upazila boundary, Union boundary, Mauza boundary and Mauza Sheet boundary have been created by using geo-processing tools of ArcGIS such as Dissolve, Erase, Intersect, Spatial Join, etc. The Project Area Map of Saghata Upazila is shown in **Map 2.1.**

2.2.2 Satellite Image Processing

Photogrammetric method uses satellite/aerial stereo images to create Digital Elevation Model and make geospatial database more effectively. With the advent of latest trends in the technologies and unique customer requirements, photogrammetry is now the leading technology for mapping. The field of photogrammetry is a rapid science with new technologies being developed constantly. Within a short period of time, the practice of photogrammetry has

changed from analog to digital. The development of digital aerial cameras has advanced significantly over the past 4-5 years. The use of digital aerial images would be more advantageous for all map and image production especially for Digital vector data and Orthophoto generation.

Since the internal precision of extracted DEMs is strictly related to the mean scale of photographs, image quality, pixel dimension and, obviously, morphology of the area, *Image Collection* is a crucial part of the project. Image was collected from Satellite image provider. The Satellite image in 0.5-meter panchromatic and 1.0-meter multi spectral four-band images in stereo pairs was procured for town area. The 0.5-meter pan and 1.74-meter multi spectral imagery was also be fused to yield 0.5-meter color imagery (pan-sharpened) and 2.5-meter stereo image was also collected for country area. Image processing was done after collecting raw digital images. The tasks involved in image processing are:

- Epi-polar Correction
- Color Balance
- Contrast Adjustment
- Sharpening
- Pyramid
- Bit Rate Setting.

2.2.3 Topographic Feature Extraction from Satellite Image

After initial image processing and building up of stereo models, extraction of topographic features has been done by a team of skilled photogrammetrist. Digital Photogrammetric Workstation (DPW) has been used as the platform for acquiring features from digital stereo images (model). Feature registration has been done considering and measuring the position of the object under its accuracy level. The Summit Evolution & Stereo Plotter of DAT/EM has been used for identifying and registration of the objects and ArcGIS 9.3 of ESRI has been used for topographic data storing and editing.

Topographic features that have been extracted by Digital Photogrammetry are as below:

- i. DTM Point Extraction
- ii. Break-lines Extraction
- iii. Water bodies extraction
- iv. Generation of DEM/TIN.

DTM/DEM/TIN/Contour Generation

- **DTM Point:** Digital photogrammetry is able to acquire 3D points for high spatial resolution DEM generation through semi-automatic procedures, overcoming the problems of process. In the approach, DTM Points was generated from Stereo Pair images by the software, and editing of the software generated DTM points was done by the Photogrammetrist comparing them with stereo model. Creating and editing of Breaklines was done after this stage.
- Contour: After creating DTM Points, Contour lines was produced 1. The contour lines was delivered in 1 km x 1 km or 5 km x 5 km blocks or one single file for the project area.
- **DEM:** Using DTM Points DEM was generated at a resolution of 10 meters in 1 km x 1 km or 5 km x 5 km blocks or one single file for the project area.
- **TIN:** Using DTM Points TIN was generated and delivered in 1 km x 1 km or 5 km x 5 km blocks for the project area.
- OrthoPhoto: An orthophoto or orthophotograph is a photograph which terrain corrected ("orthorectified") such that the scale is uniform: the photo has the same lack of distortion as a map. Orthophotographs are commonly used in the creation of a Geographic Information System (GIS).

Ortho-rectification of Images

Orthorectification is a process by which image distortions caused by topography and image orientation are geometrically corrected by the incorporation of a terrain model.

Ortho-rectification of every image was carried out using digital photogrammetric system based on result of aerial triangulation and the generated DEM.

Mosaicking of OrthoPhoto

Individual rectified photograph was assembled to form seamless mosaic.

Mosaicking of OrthoPhoto includes the following tasks

- I. Seam line Drawing: Drawing the boundary of the image delineating which part of the image go which image.
- II. Balancing of Color and Contrast within different images Feathering.

CHAPTER THREE: TOPOGRAPHIC DATA ACQUISITION

3.1 Mobilization of Survey Team

A highly technical survey team comprising Urban Planner, GIS Expert, Survey Expert and Survey Assistants was mobilized to conduct the topographic and physical feature surveys. The Urban Planner led the survey team under the close supervision of the Team Leader/Deputy Team Leader of the project to ensure the quality of the survey. A list of Survey team members has been attached in Volume-1 of the annexure.

3.2 Topographic Survey

From the reconnaissance survey there are numbers of problems are visually identify in Saghata Upazila. Therefore topographic survey holds certain importance for future plan development. Topography was surveyed by using RTK-GPS and Total Station (TS) survey technique. Topographic survey includes following features:

- Land levels/spot levels for contours at 50m intervals with denser intervals for undulations.
- Alignment and crest levels (not exceeding 50m) of roads, embankments, dike and other drainage divides.
- Alignment of rivers, lake, canal and drainage channels etc.
- Outline of bazaars, water body, swamps and forest, etc.
- Type, width, length and name of road above flood level.
- For closed boundary/outline of homestead, water bodies, swamps, forest etc. junctions, spot heights or land levels was taken roughly at 10m intervals in normal cases and contour was at 0.3 meter interval.
- Crest levels was not exceed 50m along all dyke, roads and drainage divide.

Table 3.1: Topographic Survey

No	Name of activities	Description
1	Land Levels/Spot Levels	The Total Station (TS) based surveys were conducted for
		measuring the spot levels/land levels of the project area
		(Northing, Easting, Elevation or RL).
2		The contour map has been prepared on the basis of spot
	Cananal Cantaum Dagamintians	levels readings obtained from the field survey. The detail
	General Contour Descriptions	contour information is collect by topography survey.
		Finally prepare a contour map.

No	Name of activities	Description
3	Type and conditions of Roads,	Detail Information Collect from field about physical
	Bridge and culverts	infrastructures.
4	Alignment and crest level survey	Detail information collect from field about the type,
4	(Road, Embankment /Dyke)	condition and length of road and embankment.
5	Alignment of River, Lake, Canal & Drainage Channels	Detail information collect from field about type,
		condition, depth and length of river, lake, canal and
		drainage channels.

CHAPTER FOUR: DATA PROCESSING AND ANALYSIS

4.1 General Topography of Saghata Upazila

The general topography of the study area is ranges from 3 to 80 meter MSL. The river area mainly low comparatively than the other part of the Upazila.

Using the DTM Points and the Break-lines Triangulated Irregular Network (TIN) and the Digital Elevation Model (DEM has been generated. At the last stage the contour lines have been generated with 0.3 meter interval. **Map 4.1** shows the DEM of Saghata Upazila and the **Map 4.2** shows the Contour Lines of Saghata Upazila.

4.2 Topographic Survey Findings

The findings of topographic survey of Saghata Upazila are described in the following subsections and presented in Table 4.1 to Table 4.3, Figure 4.1 to 4.3.

4.2.1 Spot Level Data

We collected spot level data at 221m interval in Saghata Upazila. After analysis, we found that maximum and minimum spot levels at Saghata Upazila are 23.50 m and 14.51. Average elevation of Saghata Upazila area is derived as 15.46 m.

Table 4.1: Summary of Spot Level Data of Saghata

Total Spot Level Points	4656
Highest Elevation	23.50m
Lowest Elevation	14.51m
Mean	19.99m
Standard Deviation	1.49

4.2.2 General Contour Description

The following table shows the ward-wise highest, lowest and average spot height of Saghata Upazila.

Table 4.2: Summary of Contour Line Data of Saghata


Total Contour Line	264
Highest Elevation	23.50m
Lowest Elevation	14.51m
Mean	19.99m
Standard Deviation	1.49

Contour Map of Saghata Upazila Gaibandha District (Upazila Map) Upazila Boundary Contour (m) Sa ghata Upazila 8.500000 - 11.000000 11.000001 - 13.500000 13.500001 - 15.500000 elopment Directorate (UDD) dopment Plan for Fourteen Upazilas Package No: 04 15.500001 - 17.000000 17.000001 - 18.500000 18.500001 - 20.000000

Map 4.1: Contour Map of Saghata

20.000001 - 23.500000

Map 4.2: Surface Analysis of Saghata Upazila

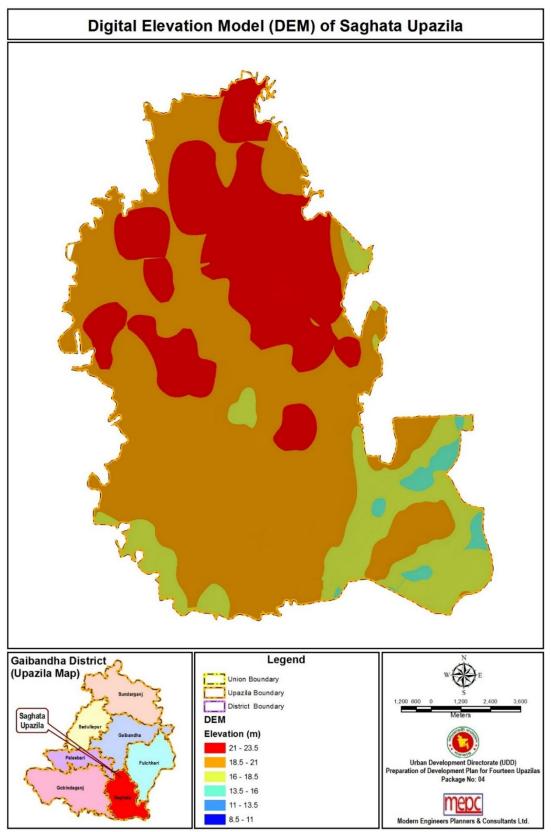



Government of the People's Republic of Bangladesh

Ministry of Housing and Public Works **Urban Development Directorate (UDD)**

Preparation of Development Plan for Fourteen Upazilas

Package-04

(Saghata Upazila, District: Gaibandha; Sariakandi Upazila and Sonatala Upazila, District: Bogra)

FINAL SURVEY REPORT

PHOTOGRAMMETRY WORK
Of
Saghata Upazila, Gaibandha

June, 2017



Table of Contents

		I	Page No.
Table of	of Conten	ts	i
List of	Tables		ii
List of	Figures		ii
СНАР	TER ON	IE: INTRODUCTION	1
1.1	Backgro		1
1.2	_	nd Limitation	1
СНАР	TER TV	VO: METHODOLOGY	2
2.1		Collection	2
2.2	Satellite	e Image Processing	2
	2.2.1	Image Pre-Processing	7
	2.2.2	GPS/INS Processing	9
	2.2.3	Aerial Triangulation	9
	2.2.4	Image Pyramid	9
	2.2.5	Tilling and Mosaicking	9
		List of Tables	
			Page No.
Table 2	.1 : Inp	out-Output in Arial Triangulation	9
		List of Figures	
]	Page No.
Figure 2	2.1 : Ger	neral Workflow for Satellite Image Processing and Data Extraction	3
Figure 2	2.2 : Tile	es of Sample Satellite Image Color and Contrast Balance	5
_		rged Sample satellite Image (Package-4) with Color and Contrast Bal	
-		ellite Image Multispectral Image	6
•		ellite Image Panchromatic 1.0 Meter	6
•		-sharpen Image- multispectral 1.0 Meter	6
Figure 2	2.7 : Ima	ge Mozaic According to Urban and Rural Area with Color Contrast	8

MEPC i

CHAPTER ONE: INTRODUCTION

1.1 Background

Photogrammetry enables the conversion of multiple two dimensional (2D) images into three dimensional (3D) models of the earth's surface. Once initial 2D images are converted into 3D, three dimensional measurement applications (software) are used to extract survey data from the stereo model.

1.2 Scope and Limitation

Digital Photogrammetry provides the facilities to capture geo data as 3D features which facilitated to measure height value of any object on the ground. Building height has been calculated from 3D image to generate Digital Elevation Model (DEM) solves the object tiling problem in image.

Photogrammetric technology. Generally images are captured from bird's eye view. So it is difficult to identify object under trees. Under trees, buildings height has been calculated using surroundings height points.

CHAPTER TWO: METHODOLOGY

2.1 Image Collection

The satellite image was ordered from Decode Ltd. the authorized reseller/partner of Digital Globe Inc. The Consultant was purchased 1.0 meter mono image for entire Bangladesh. The specifications of satellite image are as below:

For Saghata Upazila:

Image Sensor: World View-2, World View-3, GeoEye-1, Ikonos, QuickBird

Type : Ortho ready stereo (3D)

Resolution : 1.0m Panchromatic, 4.0 meter Multispectral

Source: 16th October 2015

Bit Rate : 16 Bit

Company : Digital Globe Inc., USA

2.2 Satellite Image Processing

Satellite image came with a certain level of processing. However, for the purpose of features extraction, further processing was done following of steps. The step by step procedures is shown in the Figure 2.1.

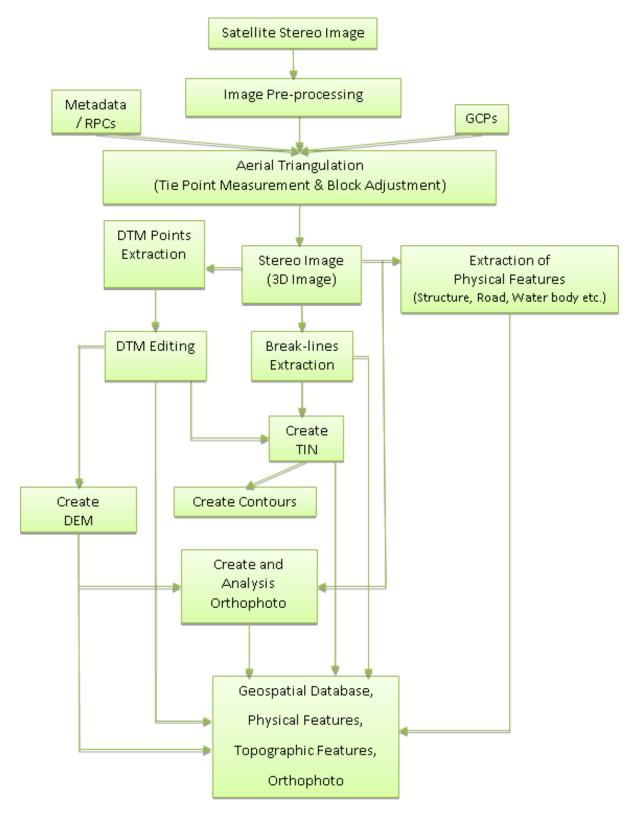


Figure 2.1: General Workflow for Satellite Image Processing and Data Extraction

2.2.1 Image Pre-Processing

Satellite image came with two parts. One has multispectral band which resolution was 4 meter and another one was panchromatic which resolution was 1 meter. However 1 meter multispectral image was made on collection of raw digital images involving image processing:

- ✓ Merge the image tile
- ✓ Color Balance
- ✓ Contrast Adjustment
- ✓ Pan-sharpening.

2.2.1.1 Merge, Color Balance and Pan-Sharpen

Satellite image comes with lots of small segment to create an individual image all image tiles have been merged and thus an individual large image has been created.

During the merge process, color and contrast has been adjusted to get a color balanced image. **Figure 2.2** shows the satellite image tiles without color and contrast balance.

During the image capturing, two types of image, one in multispectral (RGB & NIR) image which is low resolution (4.0 meter) and another in high resolution (1.0 meter) panchromatic image. For this project, 1.0 meter high resolution multispectral image is required. To have this 1.0 meter multispectral image, pan-sharpening tools will be used. This tool produces a 1.0 meter multispectral image by combining 4.0 meter multispectral image and 1.0 meter panchromatic image. **Figure 2.3** shows the merged satellite image with color and contrast balance.

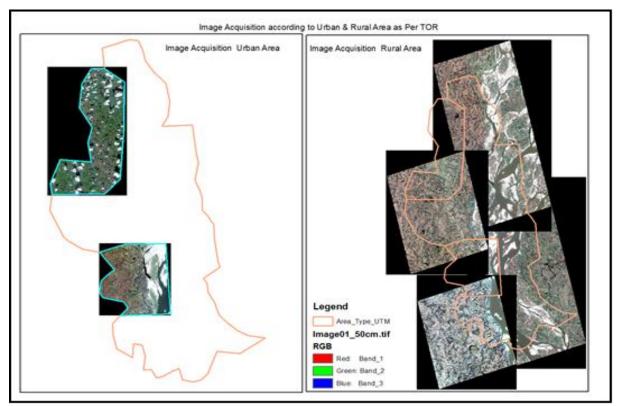


Figure 2.2: Tiles of Sample Satellite Image Color and Contrast Balance

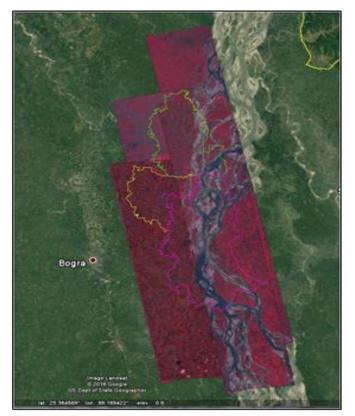


Figure 2.3: Merged Sample Satellite Image (Package-4) with Color and Contrast Balance



Figure 2.4: Satellite Image Multispectral Image



Figure 2.5: Satellite Image Panchromatic 1.0 Meter



Figure 2.6: Pan-sharpen Image-Multispectral 1.0 Meter

2.2.1.2 Bit Rate, Pyramid and Epi-polar Correction

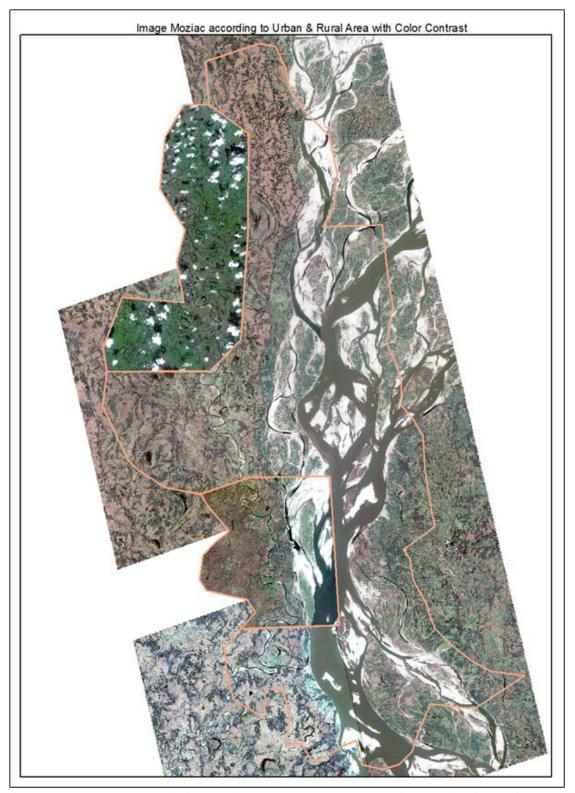


Figure 2.7: Image Mozaic According to Urban and Rural Area with Color Contrast

Bit Rate

In general practice 8 bit images are used. Satellite image can capture 11 bit image. Since the purchased satellite image is in 16 bit, it has been changed the 16 bit to 8 bit for radio matric adjustment and better handling the image.

Pyramid

To efficiently view and pan the image, the pyramid of the image has been built. The DATEM Summit Evolution software has been used for image interpretation.

2.2.2 GPS/INS Processing

Raw IMU (GPS/INS) data of image is processed and adjusted to accomplish Aerial Triangulation. In case of satellite image the RPC file is replaced the GPS/INS file.

2.2.3 Aerial Triangulation

Aerial Triangulation is a mathematical process used to determine the position and orientation of each photograph at the moment of exposure.

Table 2.1: Input-Output in Arial Triangulation

	Input for AT	Output of AT
(1)	IMU data	Geo-referenced Stereo Model
(2)	GPS (on board)	
(3)	GCP (collected from field)	
(4)	Image	
(5)	RPC file	

The GCP and BM collected from SOB have been used for correcting the 3D satellite image coordinate using Inpho Match-AT software.

2.2.4 Image Pyramid

To display the image or access the image efficiently is it must to make a image pyramid for the all the images. We did it by using ArcGIS or Edras Imagine.

2.2.5 Tilling and Mosaicking

For the whole Bangladesh the satellite image was very large. One single file was not be able to store all images. So we divide the image and produce tile for whole Bangladesh.

To access all the tiles for whole Bangladesh in DNA software we need to make a mosaic image. This mosaic image will be then used in GIS server to create a imager service. This image service will be access through http.